

# Keor HP 200-250-300

# 960433 - 960434 - 960435



## TABLE OF CONTENTS Page

1. <u>Technical features</u> .....	1
2. <u>Block diagram</u> .....	2
3. <u>Options</u> .....	2
4. <u>Software enabled functions</u> .....	2

## 1. TECHNICAL FEATURES

General Features			
Power (kVA)	200	250	300
UPS Topology	ON LINE - Double Conversion		
Nominal output power (kVA Cosφ 0.9)	200	250	300
Nominal output power (Cosφ 1.0)	180	225	270
Efficiency* (AC + AC) (%)			
@25% load		> 92	
@50% load		> 95	
@75% load		> 95	
@100% load		> 95	
Efficiency (AC + AC) (Eco Mode)		> 98	
Heat dissipation at nominal load and voltage :			
(kW)	12.4	15.4	18.5
(kcal/h x 1000)	10.6	13.3	16.0
UPS ambient temperature (°C)		0 + 40	
BATTERY ambient temperature (°C)		0 + 25	
UPS storage temperature (°C)		-10 + 70	
BATTERY storage temperature (°C)		-10 + 60	
Relative humidity % (non condensing)		< 95	
Altitude m		< 1000 (Above Sea Level)	
Power derating for altitude > 1000 m		According to "IEC62040-3", 0,5% power derating every 100m above 1000m, up to max 2000m	
Ventilation		Forced	
Requested cooling air volume (m³/h)	3500	4100	4500
Audible noise level (according to IEC EN 62040-3)		< 62	
Standard battery type lead acid		300 – 312 adjustable	
Protection degree		IP 20	
Electromagnetic compatibility EMI		According to "IEC EN 62040-2" (CE marking)	
Safety		IEC EN 62040-1	
Test and performance		IEC EN 62040-3	
Paint		RAL 7016 RAL 9005	
Accessibility		Front and top access for service	
Installation		Also against wall and/or side-by-side	
Dimensions (mm) (WxDxH)		1220 x 870 x 1905	
Weight kg (without battery)	970	1090	1170
Static load (kg/m²) (without battery)	888	998	1071
Input/output cable connection		Bottom Side (Top Side on Request)	
Transport		Base provided for forklift handling	
Transport mechanical stress		According to "IEC EN 62040-3"	
Design standard		"IEC EN 62040" "ISO 9001:2008" - "ISO 14001"	
Free contact interface		Standard to remotize the following contact: EPO – MBCB – BCB – DIESEL MODE	
Serial communication interface		Standard: RS232 - USB Optional: RS485 (Mod-Bus protocol)	
Parallel configuration (optional)		Up to 5+1 (redundant parallel) Up to 6 (power parallel)	

Input: rectifier and battery charger			
Power (kVA)	200	250	300
Input	Three-phase		
Nominal input voltage (Vac)	400		
Input voltage range %	-20/+15		
Input frequency (Hz)	50 – 60		
Input frequency range	±5 / ±10 adjustable		
Input power factor	> 0.99		
Input current THD at nominal voltage and THDV <0,5% * (%)			
@25% load		< 10	
@50% load		< 7	
@75% load		< 5	
@100% load		< 3	
DC output voltage accuracy	±1		
DC output voltage ripple	1		
Battery recharging characteristic	IU (DIN 41773)		
Maximum recharging current (A)			
- at nominal load	30	40	40
- with DCM function (max current)	100	100	100
AC-DC converter type	PFC IGBT		
Input protection	Fuses		
Nominal current absorbed from mains (at nominal load and battery charged) (A)	275	342	413
Maximum current absorbed from mains (at nom. load, nom. voltage and max. recharging current) (A)	312	392	463
Sectable walk-in (sec)	Sectable from 5" to 30"		
Sectable hold-off (sec)	Sectable from 1" to 300"		

Batteries			
Power (kVA)	200	250	300
Type (standard) other on request	Lead Sealed maintenance free		
Number of Cells	300 - 312 adjustable		
Floating Voltage at 25°C	680 for 300 cells, 707 for 312 cells (adjustable)		
Minimum Discharge Voltage Vdc	496 for 300 cells, 516 for 312 cells (adjustable)		
Inverter input power (at nominal Load) Vdc	186	232	280
Inverter input current (A) (at nominal load - minimum Vdc)	381	478	565
Battery Protection (external to the UPS)	Wall mounted fused switch box on request		
Battery Test	Included as standard		

Environment	
Estimated content of circular economy derived materials	11%
Recyclability rate calculated using the method described in technical report IEC/TR 62635*	69%


\*This value is based on data collected from a technological channel operating on an industrial basis. It does not pre-validate the effective use of this channel for end-of-life of this product.

1. TECHNICAL FEATURES (continued)

Output: Inverter			
Power (kVA)	200	250	300
Inverter Bridge	IGBT (High Frequency PWM)		
Nominal output power (Cosφ 0.9)	200	250	300
Nominal output power (Cosφ 1.0)	180	225	270
Efficiency (AC ÷ AC) (%)			
- @25% load	> 92		
- @50% load	> 96		
- @75% load	> 96		
- @100% load	> 96		
Output	Three-phase + Neutral		
Nominal Output Voltage (selectable) (Vac)	380-400-415		
Output Voltage Stability			
- Static (Balanced Load) (%)	± 1		
- Static (Unbalanced Load) (%)	± 2		
- Dynamic (Step Load 20%+ 100% +20%) (%)	± 5		
- Output Volt. Recovery Time(after step load) (ms)	< 20		
- IEC EN 62040-3	Class 1		
Phase Angle Accuracy			
- Balanced Load	± 1 Degree		
- 100% Unbalanced Load	± 2 Degrees		
Output Frequency (selectable) (Hz)	50 - 60		
Output Frequency Stability			
- Free Running Quartz Oscillator (Hz)	± 0,001		
- Inverter Sync. with Mains (Hz)	± 2 (other on request)		
- Stew rate (Hz/s)	1		
Nominal Output Current (@ 400 Vac output) (A)			
- Cosφ 0.9 (leading and lagging)	290	362	435
- Cosφ 1 (purely resistive load)	260	326	390
Overload Capability			
10 min	>100%...125%		
1 min	>125%...150%		
10 s	>150%...199%		
Short Circuit Current (A)	462	580	694
Short Circuit Characteristic	Elect. short circuit protection, current limited at above values. Automatic stop after 5 seconds		
Selectivity	Within ½ cycle (Fuse gl 20% In)		
Output Waveform	Sinusoidal		
Output Harmonic Distortion (%)			
- Linear Load	< 1		
- Non Linear Load	< 5		
- IEC EN 62040-3	Fully compliant		
Max Crest Factor without derating	3:1		

Bypass	
Automatic static by-pass	Electronic Thyristor Switch
Protection	Fuses
Bypass	Three-phase + Neutral
Nominal input voltage (Vac)	380-400-415
Input voltage range (%)	±10
Input frequency (Hz)	50-60
Input frequency range (%)	± (1+5) ±10 adjustable
Transfer mode	Without break
Transfer inverter - automatic bypass	In case of : - Static Switch test - Inverter test - Inverter not operating - Battery end of discharge
Retransfer automatic bypass - inverter	- Automatic - Block on bypass after 6 transfers within 2 minutes, reset by front panel
Overload Capability (%)	150 Continuously 1000 For 1 Cycle
Manual By-Pass	Standard: - Electronically controlled - No break

2. BLOCK DIAGRAM

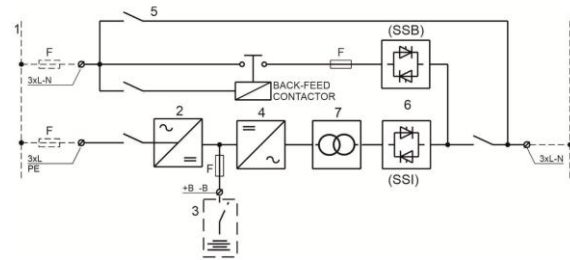

1. Input mains (separate for by-pass and rectifier)
2. Rectifier and battery charger
3. External battery
4. Inverter
5. Emergency line (by-pass) with backfeed
6. Inverter (SSI) and by-pass (SSB) static switch
7. Inverter transformer

3. OPTIONS

1. Insulation transformer on by-pass
2. Voltage adaptation auto-transformers
3. Serial interface rs-485 (mod-bus protocol)
4. Sntp adapter
5. Remote monitoring panel
6. Parallel card interface kit
7. External battery cabinet
8. Wall mounted fused switch box
9. In/out top cable entry
10. Special paint
11. Load-sync bus card interface kit

4. SOFTWARE ENABLED FUNCTIONS

1. Diesel-mode
2. Eco-mode
3. Boost-charge
4. Rectifier walk-in time
5. Rectifier delay on startup (hold-off time)
6. Frequency converter mode
7. Dcm function