UPS





UPS systems: UPS units up to

SINGLE-PHASE UPS

Consumer and Soho

Keor Multiplug



Single-phase UPS line interactive VI from 600 to 800 VA P. 14

Keor SP



Single-phase UPS line interactive VI from 600 to 2000 VA

P. 15

Keor PDU



Single-phase UPS, off-line VFD 800 VA

P. 16

Keor SPE Tower



Single-phase UPS line interactive VI-SS from 750 to 3000 VA

P. 17

Modular

Trimod HE



Three-phase UPS, on-line double conversion VFI from 10 to 80 kVA

P. 37

Trimod MCS



Modular CPS, on-line double conversion VFI from 3 to 80 kVA

P. 40

Keor MOD



Three-phase UPS, on-line double conversion VFI from 25 to 250 kVA

P. 42

Conventional

Keor Compact



Three-phase UPS, on-line double conversion VFI from 10 to 20 kVA

P. 48

Keor T Evo



Three-phase UPS, on-line double conversion VFI from 10 to 60 kVA

P. 50

Keor HP



Three-phase UPS, on-line double conversion VFI from 60 to 800 kVA

P. 52

Battery cabinet





Universal battery cabinets for all three-phase UPS from 10 to 800 kVA.

P. 62

Communication accessories

Software



P. 64



21 MVA

Keor SPE RT



Single-phase UPS line interactive VI-SS from 750 to 3000 VA $\,$ P. 18

Modular

Megaline



Single-phase UPS, on-line double conversion VFI from 1250 to 10000 VA

P. 20

Conventional

Keor LP



Single-phase UPS, on-line double conversion VFI-SS-111 from 1000 to 3000 VA

P. 24

Daker DK Plus



Single-phase UPS, on-line double conversion VFI from 1000 to 10000 VA

P. 26

Keor S



Single-phase UPS, on-line double conversion VFI from 3000 to 10000 VA

P. 30

Keor HPE



Three-phase UPS, on-line double conversion VFI from 60 to 500 kVA

P. 54

Keor XPE



Three-phase UPS, on-line double conversion VFI from 600 to 2100 kVA

P. 56

UPSaver



Three-phase UPS, on-line double conversion VFI from $670\ \text{to}\ 2670\ \text{kVA}.$ Parallelable up to 21 MVA P. 59

and software

Network interfaces and accessories



P. 65



High performance, uninterruptible service and energy efficiency.

The wide diffusion of UPS systems generally stems from an increasing dependence on electricity and the need to protect a range of equipment, data and processes that are crucial to companies. Power electronics is focused on the design and development of static UPS with increasing performance, which provide adequate energy saving along with lower environmental impact.

Safety and uninterruptible service

Any electronic device that is not properly protected by UPS systems may be subject to disturbances from the mains supply. Electrical events such as voltage dips, black-outs, voltage surges, or other voltage or frequency anomalies, can generate serious consequences including:

- interruption of services
- loss of data and information
- faults or damage to the actual electronic devices.

The solution to these problems is provided by Uninterruptible Power Supplies (UPS) which, when installed between the power supply network and the equipment, **improve the quality of the power** by ensuring **uninterruptible service** and **protection** of all devices that perform functions that are critical to the business life of companies.



Energy efficiency

Thanks to the use of the latest technologies, the new concept UPS boast high efficiency and an intelligent battery charging system that extends its useful life. In addition to significantly reducing UPS consumptions and operating costs, these features contribute to reducing the environmental impact of battery disposal.





and offers a wide range of solutions for the tertiary sector, that meet all system demands, from cabling systems for data networks, to channelling and distribution systems, to plant control and management.

Today, with a view to technological development that respects the environment and in order to face a constantly evolving market, Legrand proposes a new UPS range, a complementary offer of technological functions able to guarantee maximum protection for all systems.

Legrand UPS is currently the manufacturer with the highest growth rate on the market; it also recently received two major awards worldwide and was named Company of the Year and Company with the highest growth rate by Frost & Sullivan (an international market research and consulting firm).

These results have been achieved through a number of factors such as recent acquisitions, product development activity and, above all, growth in sales of products and services.



Corporate Social Responsibility

Green management and sustainable supply chain: these concepts are part of Legrand's Corporate Social Responsibility, which is the company's commitment to drawing up a strategy and implementing it with practical actions aimed at socially responsible behaviour towards everything around it, such as people, things and environment.

CSR involves the management of human resources, the organization and division of labour and the management of natural resources. CSR aims to assess the impact that the company's actions and decisions have internally, but also externally, on the stakeholders and the environment.

Circular economy

We are committed to creating a system that involves all stakeholders to share values, objectives and actions in order to control and reduce the environmental impact of all our economic and production processes, reduce waste and environmental impact and transform what would once have been defined as «waste» into new resources.

Controlling these aspects has an impact on the entire life cycle of the product, starting from the design of new concepts and new specifications for the materials the UPS is made of; this is possible through responsible design and procurement processes (so-called «green procurement»), with a strong focus on research and the use of innovative materials from the circular economy and alternative raw materials. When a product ends its life, all these materials can become high value-added resources that can be used in other production cycles.

Digitalization

New information technologies allow us to reduce the use of several paper documents in favor of the digital format: in this way the information is always and everywhere accessible from a PC or smartphone and at the same time we can avoid the felling of many trees.

Digitization also becomes an important driver of the circular economy, since it allows the use of tools for performance data analysis and preventive diagnostics, both useful for optimizing the life cycle and durability of the product.





or how Legrand engages with all of its employees and stakeholders.

ENVIRONMENT

or how Legrand intends to limit the Group's environmental impact.



Efficiency

Our R&D team is constantly working on the development of increasingly efficient UPSs that allow high and incremental performance with minimum energy dissipation; with regard to CO₂ emissions, we are implementing processes and products that represent an improvement in the percentage of carbon footprint compared to the past. But efficiency is not only synonymous with high performance. For us, efficiency also means ecodesign: this implies that the UPS is designed to be easily repaired, maintained and it's easy to separate its components. This means increasing the durability of our UPSs and the possibility of reusing and recycling them at the end of their life.

ENVIRONMENT

EPD/PEP

For each product range we draw up an EPD (Environmental Product Declaration) or PEP (Profil Environnemental Produit) in line with ISO 14025: it is a declaration that is a sort of environmental photograph of the product. The EPD is drawn up according to the concept of Life Cycle Assessment: it examines the environmental impact of a product throughout its life cycle, from the development of product specifications to the choice of materials to be used and the end-of-life destination of the product itself.





Distinguishing characteristics

High performance

The innovative design and high quality of the components used enable our UPS to achieve up to 97.2% efficiency, leading to significant energy savings.

Latest generation components

In-depth research on the best electronic components on the market combined with state-of-the-art manufacturing methods, make Legrand UPS extremely reliable and abreast of the times.

Environmentally sustainable products


Efficient UPS built with maximum attention to detail. Moreover, Legrand has developed an innovative testing system which reduces the energy consumed for each device manufactured.

Advanced technology

The On-line Double Conversion technology ensures a top quality power supply and maximum energy efficiency.

Reliable electronics

The optimum sizing of the power stages and thorough testing of each unit ensure excellent reliability.

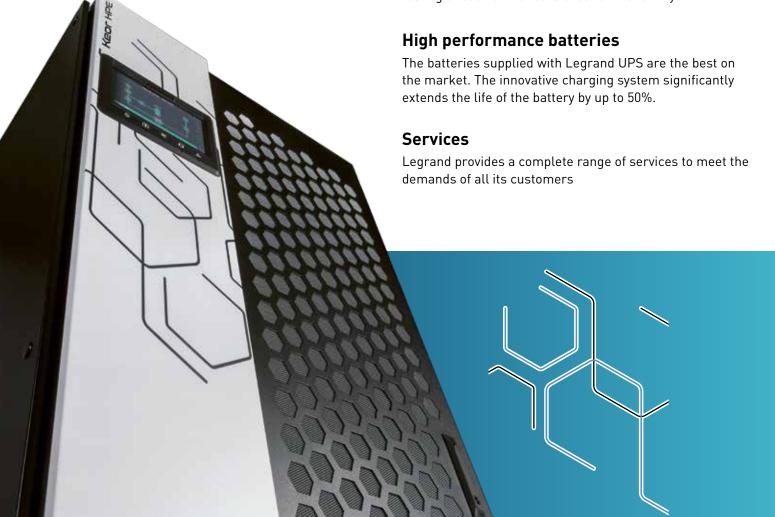



Range of **application**

Each type of UPS is characterised by different design properties, which means that the range is ideally suitable and usable in different environments, from domestic to tertiary and industrial sectors, and applications in specific fields.

DOMESTIC APPLICATIONS

Video surveillance, home alarms, smart TV, Home Entertainment systems

TRADE AND TERTIARY SECTORS

Offices, shops, points of sale

HEALTH AND HOSPITALITY SECTORS

Hospitals, medical centres, hotels

INDUSTRIAL AND LARGE TERTIARY STRUCTURE SECTORS

Factories, warehouses, shopping centres

TRANSPORT

Airports, rail and ship transport

DATA PROCESSING CENTRES

Server room, Datacenter, Colocation, Cloud





LEGRAND offers a range of UPS products that are divided into 2 different types of products:

single-phase and three-phase.

The range is wide and complete, with solutions that guarantee maximum performance in terms of power and backup time.









Keor LP

Keor S

Online

Daker DK Plus

Megaline -Megaline Rack

SINGLE-PHASE UPS



Trimod HE



Trimod MCS



Keor MOD



Keor Compact



Keor T Evo



Keor HP

Modular

THREE-PHASE UPS















Keor Multiplug

Keor SP

Keor SPE Tower

Keor SPE RT

Line Interactive













Conventional

UPSaver



The Legrand single-phase UPS range

is comprehensive and complete, with solutions that meet the demands of different application sectors, from domestic to tertiary.

The range is available from 600 VA up to 10000 VA and is divided into 2 types of products:

- Consumer and Line interactive
- On-Line double conversion

Consumer and Line Interactive

These are compact UPS, easy to install and configure and provide an excellent high quality/price ratio together with the guarantee of a long-term investment.

They are equipped with LED indicators that provide monitoring of the UPS status, whilst guaranteeing protection of the devices connected to the same.

The Line Interactive products are equipped with a filtering and stabilizing circuit (AVR: Automatic Voltage Regulator).

This version comprises:

Keor Multiplug - Keor SP - Keor SPE Tower - Keor SPE RT - Keor PDU.

On-Line double conversion

These UPS use high frequency PWM technology, suitable for use in professional environments such as IT application, offices, factories, shops and points of sale.

They are fitted with:

- DSP microprocessors for precise, constant control of all measurements and of the power factor correction circuit (PFC)
- Transformer-free technology electronics for high quality energy output with up to 96% efficiency.
- Hermetically-sealed, maintenance-free, valve regulated rechargeable batteries, lodged inside a designated section of the UPS or in one or more external cabinets.

The products that are part of this version are:

Keor LP- Daker DK Plus - Keor S - Megaline.



Keor LP

UPS for low and medium power applications, available with different types of output sockets. All versions have a slot for connecting SNMP communication interfaces.

THE ON-LINE RANGE









Keor Multiplug - Keor SP - Keor SPE Tower - Keor SPE RT

These are line-interactive technology UPS that guarantee total and reliable protection for all Small-Office and Home-Office applications. They are supplied with electronic voltage regulator and telephone protection.

THE CONSUMER AND LINE INTERACTIVE RANGE







Keor SP from 600 to 2000 VA



Keor SPE Tower from 750 to 3000 VA



Keor PDU

It is specifically designed for installation in 19" panels and racks. IT is equipped with devices to protect against full battery discharge, overloads and short circuits.







Keor PDU 800 VA



Daker DK Plus

With the reversible screen, the Daker DK Plus UPS can be used in both tower and 19" rack configuration.



Daker DK Plus from 1000 to 10000 VA



Keor S

Compact, robust and easy to move, Keor S is the perfect UPS to protect and supply loads in the industrial fields. Two different models are available as internal configuration; internal battery



only or input isolation transformer with internal battery. Protection Degree IP31.

Keor S from 3000 to 10000 VA

Megaline e Megaline Rack

These are the only modular UPS units in the single-phase range. The single cabinet and 19" rack deliver a power of 1250 to 5000 VA and can house a maximum of 4 power modules and 4 battery kits. The range also includes double cabinets with a nominal power of up to 10000 VA. Further batteries can be housed in specific cabinets, and are easy to connect thanks to the backup extension fittings.





Keor Multiplug

Single-phase VI



3 100 82

- Characteristics:
 Replaceable fuse in case of short-circuits
 LED indicators
 USB Charger
 Available outputs sockets in German or French type

Item	UPS				
	Nominal power (VA)	Active power (W)	Back-up time (min)	No. of sockets	Type of power socket
3 100 81	600	360			DE standard
3 100 83	600	360	up to 15	4+2	FR standard
3 100 82	800	480		up to 15 4+2	4+2
3 100 84	800	480			FR standard

NOTE: the stated backup times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.



Characteristics

General Characteristics	3 100 81 3 100 83	3 100 82 3 100 84	
Nominal power (VA)	600	800	
Active power (W)	360	480	
Technology	Line inter	ractive VI	
Waveform	Simulated Sinewave		
Input			
Input voltage	230 V		
Input frequency	50-60 Hz	z +/- 5Hz	
Input voltage range	170 - 29	90 VAC	
Output			
Output voltage	230 V	± 10%	
Nominal output frequency	50/60 Hz +/-1 Hz		
USB Charger	USB type A (female)		
Mechanical Characteristics			
Dimensions HxWxD (mm)	190 x 89.5 x 296		
Net weight (kg)	5	5.5	
Ambient Conditions			
Operating temperature (°C)	0 –	40	
Relative humidity (%)	< 95% non	condensing	
Noise at 1 m (dBA)	< .	40	
Estimated content of circular economy derived materials	24%		
Recyclability rate calculated using the method described in technical report IEC/TR 62635*	42%		
Conformity			
Certifications	EN 62040-1, EN 62		

^{*} The published value is based on data collected from an industrially organised technology supply chain and does not foresee the actual use by this supply chain of the electrical and electronic products at the end of their useful life.



Keor SP

Single-phase VI





3 101 83

Characteristics:

- 3-colour LED bar
- Mute Button (Silent)
 Internal AVR (automatic voltage regulator)
 USB Port
- Output sockets available for IEC, French or German standards

Item	UPS with	IEC output	sockets

	Nominal power (VA)	Active power (W)	Back-up time (min)	No. of sockets IEC	Communication ports
3 101 80	600	360	up to 15	4	USB HID
3 101 83	800	480	up to 15	4	USB HID
3 101 86	1000	600	up to 10	6	USB HID +RS232
3 101 89	1500	900	up to 10	6	USB HID +RS232
3 101 92	2000	1200	up to 10	6	USB HID +RS232

UPS with IEC output socket + German standard

	Nominal power (VA)	Active power (W)	Back-up time (min)	No. of sockets IEC+German standard	Communication ports
3 101 81	600	360	up to 15	1+1	USB HID
3 101 84	800	480	up to 15	1+1	USB HID
3 101 87	1000	600	up to 10	2+2	USB HID +RS232
3 101 90	1500	900	up to 10	2+2	USB HID +RS232
3 101 93	2000	1200	up to 10	2+2	USB HID +RS232

UPS with IEC+ French socket

	Nominal power (VA)	Active power (W)	Back-up time (min)	No. of sockets IEC+FR	Communication ports
3 101 82	600	360	up to 15	1+1	USB HID
3 101 85	800	480	up to 15	1+1	USB HID
3 101 88	1000	600	up to 10	2+2	USB HID +RS232
3 101 91	1500	900	up to 10	2+2	USB HID +RS232
3 101 94	2000	1200	up to 10	2+2	USB HID +RS232

Accessories

3 110 78 10A British Standard cable for all Keor SP


NOTE: the stated backup times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.




Characteristics

General Characteristics 3 101 81 3 101 82 3 101 87 3 101 88 3 101 90 3 101 88 3 101 91 3 3 101 88 3 101 91 3 3 101 88 3 101 91 3 3 101 88 3 101 91 3 3 101 88 3 101 91 3 3 101 88 3 101 91 3 3 101 88 3 101 91 3 3 101 88 3 101 91 3 101 88 3 101 91 3 101 88 3 101 91 3 101 88 3 101 91 3 101 88 3 101 91 3 101 88 3 101 91 3 101 88 3 101 91 3 101 88 3 101 91 3 101 81 8 101 81 91 101 81 10	101 92 101 93 101 94 2000 1200				
Active power (W) 360 480 600 900 7 Technology Line Interactive VI Waveform Simulated Sinewave					
Technology Line Interactive VI Waveform Simulated Sinewave Input 230 V ± 10% Input frequency 50-60 Hz +/- 5Hz Input voltage range 170 V-290 V Output 230 V ± 10% Output frequency (nominal) 50/60 Hz +/-1Hz USB Charger - USB type A (female)	1200				
Waveform Simulated Sinewave Input 230 V ± 10% Input frequency 50-60 Hz +/- 5Hz Input voltage range 170 V-290 V Output 0utput voltage Output frequency (nominal) 50/60 Hz +/-1Hz USB Charger - USB type A (female)					
Input 230 V ± 10% Input frequency 50-60 Hz +/- 5Hz Input voltage range 170 V-290 V Output 230 V ± 10% Output frequency (nominal) 50/60 Hz +/-1Hz USB Charger - USB type A (female)					
Input voltage					
Input frequency 50-60 Hz +/- 5Hz Input voltage range 170 V-290 V Output					
Input voltage range 170 V-290 V Output 230 V ± 10% Output frequency (nominal) 50/60 Hz +/-1Hz USB Charger - USB type A (female)					
Output 230 V ± 10% Output frequency (nominal) 50/60 Hz +/-1Hz USB Charger - USB type A (female)					
Output voltage 230 V ± 10% Output frequency (nominal) 50/60 Hz +/-1Hz USB Charger - USB type A (female)	170 V-290 V				
Output frequency (nominal) 50/60 Hz +/-1Hz USB Charger - USB type A (female)					
USB Charger - USB type A (female)	230 V ± 10%				
	31 \				
Communication and Management					
Screen and signalling 2 buttons and LED bar to monitor UPS s in real-time	2 buttons and LED bar to monitor UPS status in real-time				
Remote control available	available				
Mechanical Characteristics					
Dimensions HxWxD (mm) 120 x 138 x 330 148 x 173 x 380	0				
Net weight (kg) 5 5.5 9 10.5	11.8				
Ambient Conditions					
Operating temp. (°C) 0 – 40					
Relative humidity (%) < 95% non condensing					
Noise at 1 m (dBA) < 40					
Estimated content of circular economy derived materials					
Recyclability rate calculated using the method described in technical report IEC/TR 62635*					
calculated using the method described in technical report					


IEC sockets



German standard sockets



French socket



NOTES: The drawings refer to the Keor SP 800 version

This value is based on data collected from a technological channel operating on an industrial basis. It does not pre-validate the effective use of this channel for end-of-life of this product.

For the choice of communication accessories, see the dedicated section of this catalogue.



Keor PDU

Single-phase VFD





Characteristics:


- Low energy consumption
 Economically advantageous solution
 More sockets with complete protection
 Front installation and maintenance
- Silent operations
- Less space occupied inside the cabinet
 Lower installation weight
 Ease of wiring and installation

Item	UPS						
White	Nominal power (VA)	Active power (W)	Back-up time (min)	Type of power socket	Number - type of output socket	Communication ports	
3 103 30				FR	8 - FR		
3 103 31	800	480	up to	FR/DE/IT	8 - IEC	USB HID	
3 103 32	600	400	15	FR/DE/IT	8 - DE/IT	טטם חוט	
3 103 33				UK	8 - IEC		
Black							
3 110 16				FR	8 - FR		
3 110 17	800	480	up to	FR/DE/IT	8 - IEC	USB HID	
3 110 18	000		15	FR/DE/IT	8 - DE/IT	טטט חוט	
3 110 19				UK	8 - IEC		


NOTE: the stated backup times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.



General Characteristics	
Nominal power (VA)	800
Active power (W)	480
Input	
Input voltage	230 V
Input frequency	45-65 Hz
Input voltage range	180 - 270 VAC
Output	
Output voltage	220/230/240 Va.c. ±10%
Nominal output frequency	50/60 Hz ±1%
Power factor	0.6
Battery	
Туре	VRLA - AGM without maintenance
Charge time (h)	4-6 (90% capacity)
Communication and Mana	
Remote control	Available
Screen and signalling	3 LEDs to monitor UPS status in real-tir
Protection	
Protection type	Protection against battery dying, overload and short circuit
Mechanical Characteristic	S
Dimensions HxWxD (mm)	88 x 440 x 150
Net weight (kg)	5.5
Ambient Conditions	
Operating temperature (°C)	0 – 40
Relative humidity (%)	< 95% (non condensing)
Protection rating	IP20
Noise at 1 m (dBA)	< 40
Estimated content of circular economy derived materials	37%
Recyclability rate calculated using the method described in technical report IEC/TR 62635*	73%
Conformity	
Certifications	EN 62040-1, EN 62040-2, EN 62040-3



FR standard sockets



IEC standard sockets



Rear sockets



*This value is based on data collected from a technological channel operating on an industrial basis. It does not pre-validate the effective use of this channel for end-of-life of this product.



Keor SPE tower

Line Interactive UPS - Single phase VI-SS



Characteristics

- Power Factor: 0.8
- User friendly LCD display
- Wide input voltage range and frequency
- Hot swappable battery
- Programmable extended quantity of outlets
 Overload, short circuit, back-feed, overtemperature protection
 Powerful built-in charger
- Cold start (DC power on) RS232 & USB SNMP Slot

- EPO (Emergency Power Off)
 2 dry contacts
 Compact size & light weight

Item	UPS K	eor SP			
	Nominal power (VA)	Active power (W)	Back up time (min)	Number of sockets (10A/16A) IEC	Communication ports/slot
3 110 60	750	600	9	6/-	USB - RS232 - SNMP
3 110 61	1000	800	7	8 / -	USB - RS232 - SNMP
3 110 62	1500	1200	7	8 / -	USB - RS232 - SNMP
3 110 63	2000	1600	7	8 / -	USB - RS232 - SNMP
3 110 64	3000	2400	4	8 / 1	USB - RS232 - SNMP

Item 3 110 78


Accessories

10 A British Standard cable for 3 110 60 - 3 110 61 - 3 110 62

3 110 79 16 A British Standard cable for 3 110 63 - 3 110 64

NOTE: The stated back-up times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.

Keor SPE 750 - 1000 VA






3 110 60

3 110 61

Keor SPE 1500 - 2000 - 3000 VA







Characteristics

Characteristics					
General Characteristics	3 110 60	3 110 61	3 110 62	3 110 63	3 110 64
Nominal Power (VA)	750	1000	1500	2000	3000
Active Power (W)	600	800	1200	1600	2400
Power Factor			0.8		
Technology	Line Interactive VI				
Waveform	Pure sinewave				
Input					
Number of input phases	1Ph				
Voltage (V)	Nominal: 230 / Range: 175 - 288 @ full load				
Frequency (Hz)	47-63Hz (50/60Hz auto-sensing)				
Output					
Output Voltage	230, adjustable to 200/208/220/230/240				
Frequency (Hz)	50 or 60Hz +/- 0.5 %				
Programmable Outlets	YES (1-group programmable)				
Number of output phases					
Batteries					
Battery type	Lead-acid sealed without maintenance (VRLA			e (VRLA)	
Battery replacement		Front Acce	ess (Hot-s	wappable)
Charging Time (0-90%)			6-8 hours		
Communication and	manager	ment			
Screen and signalling	Five butto	ons, displa -time cont	ay and thre crol of the	ee-colorec status of t	I LED Bar he UPS
Communication	RS20		SNMP Slo dry contac		ROO)
Protections	Electronic circuits against overloads and short- circuit, back-feed, emergency power off (EPO), overtemperature				nd short- off (EPO),
Physical characteris	tics				
Dimensions W x H x D (mm)	170x23	38x325	1	70x238x43	38

$W \times H \times D (mm)$

	Net weight (kg)	14	14.5	18.9	23	26.5		
	Environmental cond	itions						
	Operating temperature	0 - 40°C / +32°F - + 104° F						
	Relative humidity range (%)	0-95% (Non-Condensing)						
	Storage temperature	0 °C +50 °C / +32 °F to +122 °F						
	Protection degree	IP20						
	Acoustic Noise at 1m (dBA)	< 40						
Estimated content of circular economy derived materials Recyclability rate calculated using the method described in technical report IEC/TR 62635*				≃ 41%				
				≃ 78%				

Staridards	120/211 02040 0
	collected from a technological channel operating on an industrial te the effective use of this channel for end-of-life of this product.

IEC/EN 62040-1, IEC/EN 62040-2,

Conformity

Reference product



Keor SPE RT

Line Interactive UPS - Single phase VI-SS









3 110 71

3 110 75

Characteristics

- Convertible Rack/Tower (19" rack)
- Wide input voltage range and frequency
- Convertible display helps to use both for tower and rack applications
- USB, RS232 and SNMP: all works simultaneously
- EPO (adjustable as NC/NO via LCD)
- Extended battery cabinet for RT 2U/3U Models
- 2-Dry Contacts: input failure and battery low alarm

UPS Keor SPE RT

	Size (Number of units)	Nominal power (VA)	Active power (W)	Back up time (min)	Number of sockets (10A/16A) IEC	Communication ports/slot
3 110 65	1U	750	525	10	5/-	USB - RS232 - SNMP
3 110 66	1U	1000	700	7	5/-	USB - RS232 - SNMP
3 110 67	2U	1000	800	8	8 / -	USB - RS232 - SNMP
3 110 68	1U	1500	1050	8	5/-	USB - RS232 - SNMP
3 110 69	2U	1500	1200	10	8 / -	USB - RS232 - SNMP
3 110 70	2U	2200	1980	8	8 / 1	USB - RS232 - SNMP
3 110 71	3U	2200	1980	8	8 / 1	USB - RS232 - SNMP
3 110 72	2U	3000	2700	6	8 / 1	USB - RS232 - SNMP
3 110 73	3U	3000	2700	6	8 / 1	USB - RS232 - SNMP

Item	Battery cabinets
3 110 74	For UPS ref. 3 110 67
3 110 75	For UPS ref. 3 110 69
3 110 76	For UPS ref 3 110 70/71
3 110 77	For UPS ref. 3 110 72/73

Item	Accessories
3 109 52	Rack support bracket kit
3 109 53	External manual by-pass
3 110 78	10 A British Standard cable for 3 110 65 - 3 110 66 - 3 110 67 - 3 110 68 - 3 110 69
3 110 79	16 A British Standard cable for 3 110 70 - 3 110 71 -

Characteristics

Keor SPE - 1 Units



3 110 65 / 3 110 66



3 110 68


Keor SPE - 2 Units



3 110 67 / 3 110 69




3 110 70




3 110 72

Keor SPE - 3 Units



3 110 71



3 110 73

NOTE: The stated back-up times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.

In accordance with its policy of continuous improvement, the Company reserves the right to change specifications and designs without notice. All illustrations, descriptions, dimensions and weights in this catalogue are given as a guide only.

Keor SPE RT

Line Interactive UPS - Single phase VI-SS

General specifications	3 110 65	3 110 66	3 110 67	3 110 68	3 110 69	3 110 70	3 110 71	3 110 72	3 110 73
Nominal Power (VA)	750	1000	1000	1500	1500	2200	2200	3000	3000
Active Power (W)	525	700	800	1050	1200	1980	1980	2700	2700
Power Factor	C	.7	0.8	0.7	0.8		С).9	•
Rack Unit	1	U	2U	1U	2	U	3U	2U	3U
Technology				Lin	e Interacti	ve VI			
Waveform				Р	ure sinewa	ave			
Input									
Number of input phases					1Ph				
Voltage (V)			Nomi	nal: 230 / F	Range: 17	5 - 288 @ f	full load		
Frequency (Hz)				47-63Hz (50/60Hz ai	uto-sensin	g)		
Output									
Output Voltage			230 V		le to 200/2		0/240 V		
Frequency (Hz)				50 o	r 60Hz +/-	0.5 %			
Programmable Outlets			YES	(2-group f	or 1U) (1-	group for 2	2U/3U)		
Batteries									
Battery type			Lead-a		I without m				
Battery replacement					ess (Hot-s		-		
Battery extension			1	Only 2U/	3U: YES (n	nax. 4 pcs)	1	
Legrand references	N	I/A	3 110 74	N/A	3 110 75	3 11	10 76	3 11	10 77
Charging Time (0-90%)		-			6-7 hours	6			
Communication and management	T								
Screen and signalling	Five but	ons, displa					control of t	the status c	of the UPS
Communication							y contacts		
Protections	Electronic	c circuits ag	gainst overl		short-circi ertempera		eed, emerge	ency powei	r off (EPO)
Physical characteristics			<u>, </u>	1			T.	T.	
Dimensions W x H x D (mm)	440 x 4	14 x 513	440 x 88 x 440	440 x 44 x 557	440 x 88 x 440	440 x 88 x 600	440 x 132 x 500	440 x 88 x 600	440 x 13 x 500
Net weight (kg)	1;	3.5	16.9	16.8	17.5	2	8.3	29	9.5
Battery cabinet dimensions W x H x D (mm)	N	I/A	440 x 88 x 440	N/A		2	440 x 88 x 4	140	
Net weight (kg)	-	-	27.5	-	27.5		2	8.7	
Environmental conditions	1								
Operating temperature					C / +32°F -				
Relative humidity range (%)					(Non-Cor				
Storage temperature				0°C +50°	°C / +32 °F	to +122 °	'F		
Protection degree		I	T	1	IP20	Γ			
Acoustic Noise at 1m (dBA)	< 40	< 45	< 50	< 45	< 50		<	55	
Estimated content of circular economy derived materials					≃ 41%				
Recyclability rate calculated using the method described in technical report IEC/ TR 62635*					≃ 78%				
Conformity									
Reference product standards			IEC/EN 6	2040-1. IE	C/EN 6204	10-2. IEC/E	EN 62040-3		

^{*}This value is based on data collected from a technological channel operating on an industrial basis. It does not pre-validate the effective use of this channel for end-of-life of this product.



Megaline

Modular single-phase double conversion UPS VFI





3 108 77



3 107 85



Characteristics:

- Modular single-phase UPSPower from 1250 to 10000 VA

- On-Line double conversion VFI-111
 Adaptable, expandable and redundant solutions in a single cabinet
 Swift and simple maintenance and management

- Load waiting mode operations (protection on demand)
- Output voltage adjustable in 1 volt steps from the front control panel
- Very low noise level
- Internal and external temperature reader
 Controls ventilation depending on the temperature and load
 Emergency remote shutdown option

Low environmental impact (high efficiency and reduced footprint) Single or double cabinet UPS unit depending on the output power 13 3 103 51 1250 875 1 1750 13 1 3 103 53 2500 Single of double capitlet of a finite depending of the output power Wide range of input voltage and frequency ranges Operating frequency of 50 - 60 Hz with self-recognition mode Frequency converter 50 in - 60 out or vice versa Extension of the input frequency rate for operations with genset units Eco Mode operations (energy saving) 2625 13 1 3 103 55 3750 3500 1 3 103 57 5000 13 **Double cabinet - without batteries**

3 103 60 + 3 108 59

3 103 63 + 3 108 59

3 103 66 + 3 108 59

3 103 69 + 3 108 59

3 103 72 + 3 108 59

	_	•		•	
	Nominal power (VA)	Active power (W)	Back-up time (min.)	No. Cabinet	Weight (kg)
3 103 50	1250	875	13	1	23.5
3 103 52	2500	1750	13	1	34
3 103 54	3750	2625	13	1	43
3 103 56	5000	3500	13	1	53

Single cabinet (German standard)

_ D	 hla	ah:	-

	Double Ca	Dillet			
	Nominal power (VA)	Active power (W)	Back-up time (min.)	No. Cabinet	Weight (kg)
3 103 60 + 3 107 78	5000	3500	13	2	24+50
3 103 63 + 3 107 79	6250	4375	13	2	27+58
3 103 66 + 3 107 80	7500	5250	13	2	29+65
3 103 69 + 3 107 81	8750	6125	13	2	32+73
3 103 72 + 3 107 82	10000	7000	13	2	34+80

with charger	Battery extensions
3 107 86	Cabinet with 1 bk

Single cabinet - without batteries

Active

powe (W)

Active

powe (W)

3500

4375

5250

6125

7000

Nominal

powe (VA)

Nominal

(VA)

5000

6250

7500

8750

10000

Back-up time (min.)

Back-up time (min.)

Number of

cabinets

Number of cabinets

2

2

2

2

2

	With Charge	Duttery exteriore
107 75	3 107 86	Cabinet with 1 bk
107 76	3 107 87	Cabinet with 2 bk
107 77	3 107 88	Cabinet with 3 bk
107 78	3 107 89	Cabinet with 4 bk
107 79	3 107 90	Cabinet with 5 bk
107 80	3 107 91	Cabinet with 6 bk
107 81	3 107 92	Cabinet with 7 bk
107 82	3 107 93	Cabinet with 8 bk
107 83	3 107 94	Cabinet with 9 bk
107 84	3 107 95	Cabinet with 10 bl

Single cabinet (French standard)

	g				
	Nominal power (VA)	Active power (W)	Back-up time (min.)	Number of cabinets	Weight (kg)
3 103 42	1250	875	13	1	23.5
3 103 43	2500	1750	13	1	34
3 103 44	3750	2625	13	1	43
3 103 45	5000	3500	13	1	53

NOTE: the stated backup times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.

Accessories

Relay interface kit

	710000001100
3 108 35	Power module (PW 1250)
3 108 57	Single cabinet backup extension (bk Megaline/1)
3 108 58	Double cabinet backup extension (bk Megaline/2)
3 108 59	Empty battery cabinet
3 108 60	Y cable for connecting a second additional battery cabinets (check the long life tables for the number of cables)
3 108 61	Battery cabinet extension kit for tower configuration (Megaline PL cable)
3 108 77	Manual bypass for single cabinet (BP/1)
3 108 78	Manual bypass for double cabinet (BP/2)

Additional battery charger (CB 36)

For the choice of communication accessories, see the dedicated section of this catalogue.

bk: battery kit

3 107 85

3 109 72



Megaline Rack

Modular single-phase double conversion UPS VFI





3 107 96







3 108 77

- **Characteristics:**
- Modular single-phase UPS
 Output from 1250 to 5000 VA

- Output from 1250 to 5000 VA
 Wide range of input voltage and frequency ranges
 Operating frequency of 50 60 Hz with self-recognition mode
 Frequency converter 50 in 60 out or vice versa
 Extension of the input frequency rate for operations with genset units
 Eco Mode operations (energy saving)

- Load waiting mode operations (protection on demand)Output voltage adjustable in 1 volt steps from the front control panel
- Very low noise level
- Internal and external temperature reader
 Controls ventilation depending on the temperature and load
 Emergency remote shutdown option

Item	RACKs (C	Serman sta	ındard)
	Nominal power	Active power	Back

	Nominal power (VA)	Active power (W)	Backup time (min)	Number of cabinets	Weight (kg)
3 103 79	1250	875	13	1	23.5
3 103 81	2500	1750	13	1	34
3 103 83	3750	2625	13	1	43
3 103 85	5000	3500	13	1	53

RACKs	(French s	tandard))
-------	-----------	----------	---

	Nominal power (VA)	Active power (W)	Backup time (min)	Number of cabinets	Weight (kg)
3 103 34	1250	875	13	1	23.5
3 103 35	2500	1750	13	1	34
3 103 36	3750	2625	13	1	43
3 103 37	5000	3500	13	1	53

RACKs (British standard)

	ILAOITS (D	iitisii staii	aara <i>j</i>		
	Nominal power (VA)	Active power (W)	Backup time (min)	Number of cabinets	Weigh (kg)
3 103 38	1250	875	13	1	23.5
3 103 39	2500	1750	13	1	34
3 103 40	3750	2625	13	1	43
3 103 41	5000	3500	13	1	53

RACKs - without batteries

	Nominal power (VA)	Active power (W)	Backup time (min)	Number of cabinets
3 103 80	1250	875	-	1
3 103 82	2500	1750	-	1
3 103 84	3750	2625	-	1
3 103 86	5000	3500	-	1

Backup time extensions

	Nominal power (VA)	Additional BK	Expansion (min)
3 103 87	1250	1	30
3 103 88	1250	2	52
3 103 89	1250	3	75
3 103 90	2500	1	22
3 103 91	2500	2	30
3 103 92	3750	1	18

Battery expansions for Rack UPS

3 107 96	Rack with 1 bk
3 107 97	Rack with 2 bk
3 107 98	Rack with 3 bk
3 107 99	Rack with 4 bk
3 108 00	Rack with 1 bk with charger
3 108 01	Rack with 2 bk with charger
3 108 02	Rack with 3 bk with charger
3 108 03	Rack with 4 bk with charger

Accessories

	71000001100
3 108 35	Power module (PW 1250)
3 108 77	Manual bypass for single cabinet (BP/1)
3 107 85	Additional charger (CB 36)
3 109 72	Relay interface kit
3 109 73	Telescopic runner kit for 6U rack

bk: battery kit

NOTE: The stated backup times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.

For the choice of communication accessories, see the dedicated section of this catalogue.



Megaline and Megaline Rack

Modular single-phase double conversion UPS VFI

General Characteristics	3 103 42 3 103 46 3 103 50 3 103 34 3 103 38 3 103 79	3 103 43 3 103 47 3 103 52 3 103 35 3 103 39 3 103 81	3 103 44 3 103 48 3 103 54 3 103 36 3 103 40 3 103 83	3 103 45 3 103 49 3 103 56 3 103 37 3 103 41 3 103 85	3 103 60 + 3 107 78	3 103 63 + 3 107 79	3 103 66 + 3 107 80	3 103 69 + 3 107 81	3 103 72 3 107 82
			CABINET RACK			Do	uble CABII	NET	
Nominal power (VA)	1250	2500	3750	5000	5000	6250	7500	8750	10000
Active power (W)	875	1750	2625	3500	3500	4375	5250	6125	7000
Max. expansion (VA)		50	000				10000		
Max. expansion (W)		35	500				7000		
Technology					le conversion				
UPS Architecture		Modu	lar, expanda cc	able, redun	ndant N+X v one single	vith 1250 V/ Cabinet/ Ra	A Power mo ack	dules,	
nput					and anight				
Nominal input voltage					230 V				
Input voltage range				184 - 26	4 VAC at 10	00% load			
Minimum operating voltage				100	VAC at 50%	load			
THD Input current					< 3%				
Input Power Factor					99 from 20%				
Input frequency				50 Hz / 60	Hz ± 2% a	utosensing			
Dutput	l .				00014 40	,			
Output voltage									
Frequency output	·								
THD Output Voltage									
Waveform Peak Factor					Sinusoidal 3:1				
Efficiency					up to 92%				
Overload capacity			300% fa	or 1 coc 20	00% for 5 se		r 30 coc		
Batteries			300 /6 10) 1 Sec, 20	00 /0 IOI 3 SE	50, 130 /6 10	1 30 860		
Backup time extension					Yes				
Accessories supplied									
Bypass	Automatic, internally synchronised, static and electromechanical (for overloads and operating problems)								
Alarms and signals	Wide	screen wit	h 4 alphanu	meric lines	s, multi-colo	ured status	indicator, a	udible sign	alling
Communication ports				1 RS232	port2 logic	level ports			
Protections	Electronic devices for protection against overloads, short-circuits and excessive battery discharge Operation stops at end of Backup time. Inrush current limiter on start-up.								
IN/ OUT mains connection Mechanical characteristics	German	siandard/le	rminai conr	iector with	universal m	iuiti-socket	outlet (Italia	in/German	standard
Net weight (kg)	23.5	34	43	53	24 + 50	26.5+57.5	29 + 65	31 5+72 5	34 + 8
Megaline Dimensions (HxWxD) (mm)	20.0		70 x 570		24 1 30		475 x 270 x		1 34 1 0
Megaline Rack Dimensions (HxWxD) (mm)			83 x 582				-		
Power modules installed	1	2	3	4	4	5	6	7	8
Free power expansion slots	3	2	1	-	4	3	2	1	-
Installed battery kits	1	2	3	4	4	5	6	7	8
Free backup extension slots	3	2	1	-	6	5	4	3	2
Ambient conditions									
Operating temperature (°C)					0 – 40				
Protection rating					IP20				
Relative humidity (%)				< 95%	(non cond	ensing)			
Noise at 1 m from the unit (dBA)					< 40				
TVOISC AL TITITOTT LITE UTIL (UDA)									
Certifications									
,			EN	N 62040-1,	EN 62040-2	2, EN 62040)-3		

Megaline and Megaline Rack

Modular single-phase double conversion UPS VFI

Long backup time table for single and double cabinet versions

Model	Power	Back-up time	no. cabinets and dimensions HxWxD (mm)	Codes
			Single Cabinet	
	1,250 VA	30'	1x (270 x 475 x 570)	3 103 73
	1,250 VA	52'	1x (270 x 475 x 570)	3 103 74
	1,250 VA	75'	1x (270 x 475 x 570)	3 103 75
	2,500 VA	22'	1x (270 x 475 x 570)	3 103 76
	2,500 VA	30'	2x (270 x 475 x 570)	3 103 77
	2,500 VA	52'	2x (270 x 475 x 570)	3 103 52 + 3 107 78
	2,500 VA	63'	2x (270 x 475 x 570)	3 103 52 + 3 107 79
	3,750 VA	18'	1x (270 x 475 x 570)	3 103 78
	3,750 VA	29'	2x (270 x 475 x 570)	3 103 54 + 3 107 77
	3,750 VA	44'	2x (270 x 475 x 570)	3 103 54 + 3 107 79
	3,750 VA	67'	2x (270 x 475 x 570)	3 103 54 + 3 107 82
	5,000 VA	22'	2x (270 x 475 x 570)	3 103 56 + 3 107 76
	5,000 VA	30'	2x (270 x 475 x 570)	3 103 56 + 3 107 78
	5,000 VA	46'	2x (270 x 475 x 570)	3 103 56 + 3 107 81
	5,000 VA	63'	2x (270 x 475 x 570)	3 103 56 + 3 107 84
			Double Cabinet	
	5,000 VA	22'	2x (270 x 475 x 570)	3 103 60 + 3 107 80
	5,000 VA	30'	2x (270 x 475 x 570)	3 103 60 + 3 107 82
	5,000 VA	46'	3x (270 x 475 x 570)*	3 103 60 + 3 107 84 + 3 107 75
	5,000 VA	63'	3x (270 x 475 x 570)*	3 103 60 + 3 107 84 + 3 107 78
	6,250 VA	20'	2x (270 x 475 x 570)	3 103 63 + 3 107 81
	6,250 VA	30'	2x (270 x 475 x 570)	3 103 63 + 3 107 84
	6,250 VA	47'	3x (270 x 475 x 570)*	3 103 63 + 3 107 84 + 3 107 78
	6,250 VA	60'	3x (270 x 475 x 570)*	3 103 63 + 3 107 84 + 3 107 81
	7,500 VA	18'	2x (270 x 475 x 570)	3 103 66 + 3 107 82
	7,500 VA	30'	3x (270 x 475 x 570)*	3 103 66 + 3 107 84 + 3 107 76
	7,500 VA	48'	3x (270 x 475 x 570)*	3 103 66 + 3 107 84 + 3 107 81
	7,500 VA	59'	3x (270 x 475 x 570)*	3 103 66 + 3 107 84 (x2)
	8,750 VA	20'	2x (270 x 475 x 570)	3 103 69 + 3 107 84
	8,750 VA	30'	3x (270 x 475 x 570)*	3 103 69 + 3 107 84 + 3 107 78
	8,750 VA	45'	3x (270 x 475 x 570)*	3 103 69 + 3 107 84 + 3 107 83
	8,750 VA	61'	4x (270 x 475 x 570)*	3 103 69 + 3 107 84 (x2) + 3 107 78
	10,000 VA	22'	3x (270 x 475 x 570)*	3 103 72 + 3 107 84 + 3 107 76
	10,000 VA	30'	3x (270 x 475 x 570)*	3 103 72 + 3 107 84 + 3 107 80
	10,000 VA	46'	4x (270 x 475 x 570)*	3 103 72 + 3 107 84 (x2) + 3 107 76
	10,000 VA	60'	4x (270 x 475 x 570)*	3 103 72 + 3 107 84 (x2) + 3 107 81

^{*}The configuration requires the use of a Y 3 108 60 connection cable (the number of cables required is equal to the no. of cabinets -2)

Long backup time table for rack versions

Model	Power	Back-up time	no. cabinets and dimensions HxWxD (mm)	Codes
			Rack	
	1,250 VA	30'	1 (6U)	3 103 87
	1,250 VA	52'	1 (6U)	3 103 88
	1,250 VA	75'	1 (6U)	3 103 89
	2,500 VA	22'	1 (6U)	3 103 90
	2,500 VA	30'	1 (6U)	3 103 91
	2,500 VA	52'	2 (6U + 3U)	3 103 81 + 3 107 99
	2,500 VA	63'	3 (6U + 2x3U)	3 103 81 + 3 107 99 + 3 107 96
	3,750 VA	18'	1 (6U)	3 103 92
	3,750 VA	29'	2 (6U + 3U)	3 103 83 + 3 107 98
	3,750 VA	44'	3 (6U + 2x3U)	3 103 83 + 3 107 99 + 3 107 96
	3,750 VA	67'	3 (6U + 3x3U)	3 103 83 + 3 107 99 (x2)
	5,000 VA	22'	2 (6U + 3U)	3 103 85 + 3 107 97
	5,000 VA	30'	2 (6U + 2x3U)	3 103 85 + 3 107 99
	5,000 VA	46'	3 (6U + 3x3U)	3 103 85 + 3 107 99 + 3 107 98
	5,000 VA	63'	4 (6U + 4x3U)	3 103 85 + 3 107 97 + 3 107 99 (x2)
			6U= 483 x 266 x 582 3U= 483 x 133x 584	

NOTE: the stated backup times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.



Keor LP

Conventional UPS - Single phase On-line double conversion VFI



- Characteristics:
 Single-phase UPS
 Power from 1 to 3 kVA
 VFI-SS-111 on-line double conversion
 RS232 communication port
 LAN / SNMP connectivity
 Uptime can be extended with additional battery cabinets
 Compact design and low footprint
- Compact design and low footprint

Item	UPS wit	th IEC so	ckets			
	Nominal power (VA)	Active power (W)	Backup time (min)	No. of sockets IEC 10A	No. of french socket	Weight (kg)
3 101 5	1000	900	5	3	-	10
3 101 5	2000	1800	5	6	-	17
3 101 5	3000	2700	5	6	-	23
			_4			

	UPS wit	h french	standard	sockets		
	Nominal power (VA)	Active power (W)	Backup time (min)	No. of sockets IEC 10A	No. of french socket	Weight (kg)
3 101 55	1000	900	5	3	1	10
3 101 57	2000	1800	5	3	2	17
3 101 59	3000	2700	5	6	2	23

	Accessories
	Description
3 105 98*	Additional battery cabinet for 3 101 54 - 3 101 55
3 105 99*	Additional battery cabinet for 3 101 56 - 3 101 57
3 106 00*	Additional battery cabinet for 3 101 58 - 3 101 59
3 109 58	Additional battery charger for battery cabinet 3 105 98
3 109 60	Additional battery charger for battery cabinet 3 105 99
3 100 85	Additional battery charger for battery cabinet 3 106 00
3 109 53	Bypass
3 110 78	10 A british standard cable for 3 101 54 - 3 101 55 - 3 101 56 - 3 101 57
3 110 79	16 A british standard cable for 3 101 58 - 3 101 59

^{*}Battery included


NOTE: the stated backup times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.


Keor LP 1000







Keor LP 2000





Keor LP 3000





For the choice of communication accessories, see the dedicated section of this catalogue.



Keor LP

Conventional UPS - Single phase On-line double conversion VFI

eneral characteristics	3 101 54	3 101 56	3 101 58	
eneral characteristics	3 101 55	3 101 57	3 101 59	
Nominal power (VA)	1000	2000	3000	
Active power (W)	900	1800	2700	
Technology		On-line double conversion VFI-SS-11	1	
Waveform		Sinusoidal		
Architecture		UPS with extendable Backup time		
put characteristics				
Input voltage		230 V		
Input frequency		45-65 Hz ±2 % Autosensing		
Input voltage range		210 V÷240 Vac at 100% load		
Input power factor		> 0,99		
utput characteristics				
Output voltage		230 V ± 1 %		
Efficiency		Up to 90 %		
Output frequency (nominal)		50/60 Hz synchronised		
Peak factor		3:1		
THD of output voltage		< 3% with linear load		
Overload capacity:	<105% ONLINE mode, 121÷150% for 10 sec., 106÷120% for 30 sec., >151% instant transfer to bypass			
Bypass	Automatic, internal, synchronised, electromechanical (for overloads and operating problems)			
atteries				
Backup time extension		Sì		
Backup time (min)		5		
ommunication and management				
Screen and signalling		LED status indicator, alarms and au		
Communication ports	1 RS232 serial p	ort, 1 slot for network interface conne	ection (ex. CS141)	
Emergency Power Off (EPO)		Yes		
Remote control	Sof	tware can be downloaded free of ch	arge	
echanical characteristics				
Dimensions (H x W x D) (mm)	236 x 144 x 367	322 x 151 x 444	322 x 189 x 444	
Dimensions of battery cabinet (H x W x D) (mm)	322 x 151 x 444	322 x 151 x 444	322 x 151 x 444	
Battery cabinet Net weight (kg)	31	31	31	
mbient conditions				
Ambient operating temperature (°C)		0 - 40		
Relative humidity (%)		20 - 80 non condensing		
Noise at 1 m (dBA)		< 50		



Dual conversion online UPS (rack/tower) - single phase VFI







3 101 77

Characteristics:

- Characteristics:

 Conventional single-phase UPS
 Power from 1 to 10 kVA
 0.9 power factor for 1000-3000, 1 for 5000-10000
 On-Line double conversion VFI-111
 User-friendly display
 Additional battery compartment to extend backup time
 Intelligent battery management
 Operator-friendly replaceable battery
 Display of battery status system parameters battery of

- Display of battery status, system parameters, battery charge level and faults.
- Dedicated slot to connect one of the following two optional accessories: network interface (WEB/SNMP) or relay interface capable of providing isolated contacts for applications on industrial
- panels or remote alarm panels.

 Automatic bypass (and manual, optional) to guarantee uninterruptible power supply to critical loads, in the event of electronic failure, overload, overheating or scheduled maintenance.

 Maintenance bypass switch box (MTBS).

Item	Convertible l	JPS with batt	eries
	Nominal power (VA)	Active power (W)	Ba

	Nominal power (VA)	Active power (W)	Backup time (min)	Weigh (kg)
3 101 70	1000	900	9	16
3 101 71	2000	1800	10	29.5
3 101 72	3000	2700	7	30
3 101 73	5000	5000	6	60
3 101 74	6000	6000	5	60

	Convertible L	JPS without ba	atteries	
	Nominal power (VA)	Active power (W)	Phase configuration	Weight (kg)
3 101 75	5000	5000	1/1	25
3 101 76	6000	6000	1/1	25
3 101 77	10000	10000	1/1	26
3 101 78*	10000	9000	3/1	28

^{*} three-phase input - single-phase output version

	Battery cabinet with batteries
3 106 60	Battery cabinet for 3 101 70
3 106 61	Battery cabinet for 3 101 71
3 106 62	Battery cabinet for 3 101 72
3 106 63	Battery cabinet for 3 101 73 - 3 101 74 - 3 101 75 - 3 101 77
3 106 64	Battery cabinet for 3 101 77 - 101 78

NOTE: the stated backup times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.



Item	Empty battery cabinet
3 106 65	Battery cabinet for 3 101 70
3 106 66	Battery cabinet for 3 101 71
3 106 67	Battery cabinet for 3 101 72
3 106 68	Battery cabinet for 3 101 73 - 3 101 74 - 3 101 75 - 3 101 76
3 106 69	Battery cabinet for 3 101 77 - 101 78
	Assessments
	Accessories
3 109 52	Rack support bracket kit
3 109 53	External manual bypass for 3 101 70 -3 101 71 - 3 101 72
3 109 63	External manual bypass for 3 101 73 - 3 101 74 - 3 101 75 - 3 101 76 - 3 101 77
3 109 69	Dry contact card
3 109 59	Additional charger for 3 101 70
3 109 61	Additional charger for 3 101 71 - 3 101 72
3 109 54	Additional charger for 3 101 73 - 3 101 74 - 3 101 75 - 3 101 76 - 3 101 77 - 3 101 78
3 110 78	10 A british standard cable for 3 101 70 - 3 101 71
3 110 79	16 A british standard cable for 3 101 72



UPS - double conversion online VFI

Characteristics									
General characteristics	3 101 70	3 101 71	3 101 72	3 101 73	3 101 75	3 101 74	3 101 76	3 101 77	3 101 78
Nominal power (VA)	1000	2000	3000	50	00	60	000	10000	10000
Active power (W)	900	1800	2700	50	00	60	000	10000	9000
Technology				On-Line Do	uble Conver	sion VFI-SS	S-111		
Waveform					Sinusoid	al			
UPS Architecture				conver	tible tower a	and rack 19			
nput									
Input voltage				23	O V				380V 3F+N
Input frequency				50-60	Hz ±5% Au	utosensing			
Input voltage range	180 - 3	00 Va.c. at t	ull load		170 - 2	80 Va.c. at 1	full load		305 - 485 Va. at full load
THD Input current				•	< 3%				,
Input power factor				> 0	.99				> 0.9
Output									
Output voltage					230V ± 1	%			
Nominal output frequency				50/60 Hz (LC	D screen s	ettings) +/-	0,1%		
	Up to 90%	Up to 91%		, , ,		Up to 94%			Up to 90%
Crest factor				<u> </u>	3:1				
THD Output Voltage				< ;	3% with line	ar load			
Output Voltage Tolerance					±1%			,	
Internal automatic bypass					Include				
External maintenance bypass	optional	optional	optional	_	-	_	_	_	_
Satteries	ориона	optional	optional						
Backup time extension					Yes				
Communication and Management					100				
Screen and signalling			LCD dis	play with thr	ee buttons	and five LEI	Ds to monito	or e	
Communication ports		UPS status and main operating parameters in real time RS232, USB RS232							
Remote control				110202	Available	Δ			110232
Network interface slot					Yes	<u> </u>			
Backfeed protection					Yes				
Remote emergency power Off					Yes				
(EPO)									
Mechanical Characteristics				440,400					
Dimensions HxWxD (mm)	440 x 88 (2U) x 405	440 x 88	2U) x 600	440x196 (4U)x680	440x88 (2U)x680	440x196 (4U)x680	440x88 (2U)x680	440x13	2 (3U) x680
Net weight (kg)	16	29.5	30	60	25	60	25	26	28
Battery cabinet dimensions HxWxD (mm)	440x196 (4U)x425	440 x 88	2U) x 600	-	440 x 88 (2U) x 680	-	440 x 88 (2U) x 680	440 x 13	32 (3U) x 680
Ambient Conditions									
Operating temperature (°C)					0 – 40				
Protection rating					IP20				
Relative humidity (%)				< 95	% (non con	densing)			
Noise at 1 m from the unit (dBA)					< 50				
Heat Dissipation (BTU/h)	490	654	818	98	32	13	300		1636
Estimated content of circular economy derived materials					37%				
					74%				
the method described in technical									
the method described in technical report IEC/TR 62635*									
the method described in technical report IEC/TR 62635* Conformity				FN 62040-	1 FN 62040)-2 FN 6204	40-3		
Recyclability rate calculated using the method described in technical report IEC/TR 62635* Conformity Certifications Warranty				EN 62040-	1, EN 62040)-2, EN 6204	40-3		

NOTE: The stated backup times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment

^{*}This value is based on data collected from a technological channel operating on an industrial basis. It does not pre-validate the effective use of this channel for end-of-life of this product.



UPS - On-line double conversion VFI, 120V



3 101 40

Item	Convertible	120V UPS witl	h batteries (UI	_)
	Nominal power (VA)	Active power (W)	Backup time (min)	Weight (kg)
3 101 40	1000	900	up to 15	11
3 101 41	1500	1350	up to 15	14,5
3 101 42	2000	1800	up to 15	20
3 101 43	3000	2700	up to 15	27
	Battery cabir	net with batter	ies (UL)	

	Battery cabinet with batterie
	Description
3 101 44	Battery cabinet for 3 101 40 (UL)
3 101 45	Battery cabinet for 3 101 41 (UL)
3 101 46	Battery cabinet for 3 101 42 (UL)
3 101 47	Battery cabinet for 3 101 43 (UL)

	Accessories
	Description
3 109 52	Rack support bracket ki
3 109 69	Dry contact card

NOTE: the stated backup times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.

General characteristics	3 101 40	3 101 41	3 101 42	3 101 4
Nominal power (VA)	1000	1500	2000	3000
Active power (W)	900	1350	1800	2700
Technology	On-line o	double con	version VF	I-SS-111
Waveform		Sinus	soidal	
Architecture	Convertible tower and 19" rack			
nput characteristics				
Input voltage			0 V	
Input frequency			% autosens	
Input voltage range	(at full load	t
THD of input current		< ;	3%	
Input power factor		> 0	,99	
Input connection	NEMA	5-15P	NEMA 5-20P	NEMA L5-30F
Output characteristics				
Output voltage		100/110	adjustable /115/120	
Output frequency (nominal)	50/60 Hz	+/- (able via LC).1%	D panel
Efficiency		up to		
Peak factor		3	:1	
THD of output		< 3% with	linear load	
Voltage		1.	1.0/	
Output voltage tolerance		<u></u>	1% 	6*NEM
Output Connection	6*NEM	A 5-15R	6*NEMA 5-20P	5-20P 1*NEM/ L5-30F
Internal automatic bypass		inclu	ıded	
Batteries				
Backup time extension		Y	es	
Battery nominal voltage (Vdc)	24	36	48	72
Communication and manag				
Screen and	Fou		and five LE	Ds
signalling	DO		ne control	
Communication ports	K52		SB serial p	orts
Remote control Connector for network		Avai	lable	
interface		SN	MP	
Back feed protection		V	es	
Emergency power off (EPO)			es	
Mechanical characteristics				
Dimensions (H x W x		x 88	440 x 88 (2U) x	440 x 8 (2U) x
D) (mm) Net weight (kg)	(2U) :	14.5	485 20	600 27
Dimensions of battery cabinet H x W x D (mm)		40 x 88 (2	2U) x 600	
Ambient conditions				
Operating temperature (°C)		0 - 4	10°C	
Protection index		IP	20	
Relative humidity (%)	0-90	% (without	condensa	ition)
* ` '			50	
Noise at 1 m (dBA)				
Noise at 1 m (dBA) Certifications				



Long backup times table

Model	Power	Back-up time	No. cabinets and dimensions HxWxD (mm)	Codes
		9'	440 x 88 x 405	3 101 70
	1000 VA	1h 27'	440 x 88 x 405 + 440 x 196 x 425	3 101 70 + 3 106 60
		3h	440 x 88 x 405 + 440 x 196 x 425 (x2)	3 101 70 + 3 106 60 (x2)
		10'	440 x 88 x 600	3 101 71
	2000 VA	45'	440 x 88 x 600 (x2)	3 101 71 + 3 106 61
		1h 28'	440 x 88 x 600 (x3)	3 101 71 + 3 106 61 (x2)
	3000 VA -	7'	440 x 88 x 600	3 101 72
		31'	440 x 88 x 600 (x2)	3 101 72 + 3 106 62
	3000 VA	58'	440 x 88 x 600 (x3)	3 101 72 + 3 106 62 (x2)
	1h 29'	440 x 88 x 600 (x4)	3 101 72 + 3 106 62 (x3)	
		6'	440 x 88 x 680 + 440 x 88 x 680	3 101 75 + 3 106 63
	2000 VA 3000 VA 3000 VA 6000 VA 10000 VA	19'	440 x 88 x 680 + 440 x 88 x 680 (x2)	3 101 75 + 3 106 63 (x2)
1 103		32'	440 x 88 x 680 + 440 x 88 x 680 (x3)	3 101 75 + 3 106 63 (x3)
		50'	440 x 88 x 680 + 440 x 88 x 680 (x4)	3 101 75 + 3 106 63 (x4)
		5'	440 x 88 x 680 + 440 x 88 x 680	3 101 76 + 3 106 63
		15'	440 x 88 x 680 + 440 x 88 x 680 (x2)	3 101 76 + 3 106 63 (x2)
		30'	440 x 88 x 680 + 440 x 88 x 680 (x3)	3 101 76 + 3 106 63 (x3)
		45'	440 x 88 x 680 + 440 x 88 x 680 (x4)	3 101 76 + 3 106 63 (x4)
		6'	440 x 132 x 680 + 440 x 132 x 680	3 101 77 + 3 106 64
		17'	440 x 132 x 680 + 440 x 132 x 680 (x2)	3 101 77 + 3 106 64 (x2)
	DK 5000 VA 6000 VA	28'	440 x 132 x 680 + 440 x 132 x 680 (x3)	3 101 77 + 3 106 64 (x3)
		41'	440 x 132 x 680 + 440 x 132 x 680 (x4)	3 101 77 + 3 106 64 (x4)
		54'	440 x 132 x 680 + 440 x 132 x 680 (x5)	3 101 77 + 3 106 64 (x5)
		7'	440 x 132 x 680 + 440 x 132 x 680	3 101 78 + 3 106 64
Daker DK		19'	440 x 132 x 680 + 440 x 132 x 680 (x2)	3 101 78 + 3 106 64 (x2)
plus	10000 VA	31'	440 x 132 x 680 + 440 x 132 x 680 (x3)	3 101 78 + 3 106 64 (x3)
3 - 1		45'	440 x 132 x 680 + 440 x 132 x 680 (x4)	3 101 78 + 3 106 64 (x4)
		59'	440 x 132 x 680 + 440 x 132 x 680 (x5)	3 101 78 + 3 106 64 (x5)

NOTE: the stated backup times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.

Configuration

	1000 VA 2 cabinet L 2U + 4U	2000 VA 2 cabinet L 2U + 2U	3000 VA 3 cabinet L 2U +2U + 2U	6000 VA 2 cabinet L 2U + 2U	10000 VA 2 cabinet L 3U + 3U
TOWER version					
	1000 VA 2 cabinet	2000 VA 2 cabinet	3000 VA 3 cabinet	6000 VA 2 cabinet	10000 VA 2 cabinet

	1000 VA 2 cabinet	2000 VA 2 cabinet	3000 VA 3 cabinet	6000 VA 2 cabinet	10000 VA 2 cabinet
	H 2U + 4U (294mm)	H 2U + 2U (196mm)	H 2U + 2U + 2U (294mm)	H 2U + 2U (196 mm)	H 3U + 3U (294mm)
RACK version					



Keor S

Conventional UPS - Single-phase On-line double conversion





3 101 21

3 107 41

- Characteristics:
 3kVA to 10 KVA Capacity Range
 1 Phase Input / 1 Phase Output
- IGBT Inverter IGBT Rectifier
- High EfficiencyDigital Signal Processor (DSP)

- Digital Signal Processor (DSP)
 High Input Power Factor (PFC)
 High Output Power Factor
 Low Input and Output Total Harmonic Distortion (THD)
 Generator Compatible Operation
 Standard IP31 Protection for Industrial Applications
 On Site Modular Paralleling Capability up to 4 Units (except 3kVA)
 Additional External Chargers for Long Back-Up Time Solutions (6-10kVA only)
 Availability of Different Communication Types
 User friendly diagnostic
 Advanced management and communication

- Advanced management and communication
 Integrated By-pass for maintenace
 LCD display with interactive menù

Sina	e-p	hase	UPS

	Nominal power (VA)	Active power (W)	Backup time (min)	Net weight (kg)
3 101 21	3000	2400	10	53
3 101 22	3000	2400	27	75
3 101 23	3000	2400	50	97
3 101 28	6000	5400	22	106
3 101 31	10000	9000	10	114

Single-phase UPS with isolation transformer

	J			• • • • • • • • • • • • • • • • • • • •
	Nominal power (VA)	Active power (W)	Backup time (min)	Net weight (kg)
3 101 25	3000	2400	10	85
3 101 29	6000	5400	0	100
3 101 35	10000	9000	0	126

Battery cabinet

Description	

3 107 40	Empty battery cabinet
3 107 41	Battery cabinet (for KEOR S 3

3 107 42 Battery cabinet (for KEOR S 3000)

3 107 43 Battery cabinet (for KEOR S 3000) **3 107 44** Battery cabinet (for KEOR S 6000-10000)

3 107 45 Battery cabinet (for KEOR S 6000-10000)

Accessories

Description

3 109 61 Battery charger for additional battery cabinet

(for 3 107 41 - 3 107 42 - 3 107 43) 3 109 54 Battery charger for additional battery cabinet (for 3 107 44 - 3 107 45)


NOTE: The stated Backup times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.

For the choice of communication accessories, see the dedicated section of this catalogue.

UPS with internal batteries Backup time up to 50 min for 3 kVA




UPS for long Backup time with additional battery cabinet



UPS with isolation transformer built in



Rear pannel



Long Backup time table

Power	UPS	Battery cabinet	Backup time (min.)
6000	3 101 28	3 107 44	55
6000	3 101 28	3 107 45	85
10000	3 101 31	3 107 44	27
10000	3 101 31	3 107 45	50
6000	3 101 29	3 107 45	55
6000	3 101 29	3 107 44	22
10000	3 101 35	3 107 44	10
10000	3 101 35	3 107 45	27



Keor S

Conventional UPS - Single-phase On-line double conversion

General characteristics	3 kVA	6 kVA	10 kVA
Nominal power (VA)	3000	6000	10000
Active power (W)	2400	5400	9000
Technology	1	On-line double conversion	
Waveform		Sinusoidal	
Architecture		conventional UPS	
Input characteristics			
Input voltage		220V-230V-240V	
Input frequency		45-65 Hz	
Input voltage range	160V-288V	195V-:	280 V
THD of input current		6%	
Input power factor		> 0,99	
Output characteristics			
Output voltage		230V/240V Adjustable from Front	
Output frequency (nominal)	50 /60 H	z Adjustable from Front Panel +/-	0,05%
Crest factor		2,5:1	
THD of output voltage	< 1,5% with linear load < 3% with non-linear load		
Overload capacity	10 seconds at 125%-150% 120 seconds at 100%-120% 30 seconds at 106%-120% 30 seconds at 121%-150%		
Efficiency in Eco mode		98%	
Bypass	-	Automatic bypass and ma	nual maintenance bypass
Batteries			
Backup time extension		Yes	
Communication and management		Available	
LCD Display Communication Port	1 RS232 serial ports, 1 USB port,	1 RS232 serial ports, mod	dbus and SNMP optional
	modbus and SNMP optional		The second second
Remote Management Mechanical characteristics		Available	
Dimensions H x W x D (mm)		716 x 275 x 776	
Dimensions battery cabinet H x W x D (mm)		716 x 275 x 776	
Ambient conditions		110 X 213 X 110	
Operating temperature (°C)		0 - 40	
Relative humidity (%)		<95% (non condensing)	
Protection index		IP31	
Noise at 1 m (dBA)		< 50	
Compliance			
Reference product standards	FN	62040-1. EN 62040-2. EN 62040	_3

MODULAR THREE-PHASE UPS

Its continuous research combined with modern production methods has allowed **Legrand to launch** state-of-the-art modular **UPS units on the market**, with top ranking performances: efficiency certified up to 96,5% and unit power factor.

Thanks to the highperformance components and space-efficient structures, these products are the ideal solution for advanced energy management and cost containment.

The Legrand modular UPS units are high frequency PWM uninterruptible power supplies, On Line type with Double Conversion, modular architecture, and redundant N+X configuration option.

They can be sized to meet the customer's needs, without precluding any future implementations. The products that are part of this version are:


Trimod HE - Trimod MCS - Keor MOD



CERTIFIED **EFFICIENCY**

The Legrand modular UPS guarantee exceptionally high efficiency values, up to 4% higher than the minimum values required by the European Code of Conduct (92%).

96.5%

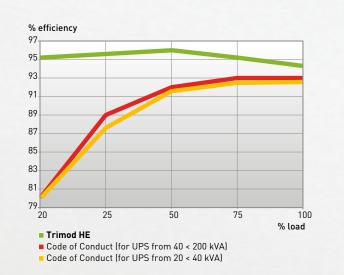

Increase in stand-by time and power

The different models are composed by STANDARD modules that can be added to existing UPS units to extend both power and backup time and quarantee maximum levels of redundancy.

Scalability of backup times

The expansion can be performed quickly and easily by adding battery drawers to the same cabinet, depending on the power of the UPS and the backup time requirements.



Single drawer with 5 9Ah batteries for Trimod HE and Trimod MCS.



Battery drawer for Keor MOD, designed to contain up to 24 9 or 11 Ah batteries.

Power and redundancy modules

The power modules are available in both single-phase and three-phase versions, depending on the power of the UPS. Both models guarantee low weight and overall dimensions along with top ranking performance.

Thanks to the construction technology the various redundancy levels can be set to always guarantee maximum service continuity.



Single phase power module for Trimod HE and Trimod MCS. Compact and lightweight (only 8.5 kg)




Three-phase power module for Keor MOD. Reaches a power output of 25 kW with just 2 rack units required

MODULAR THREE-PHASE UPS

High redundancy levels


Redundancy on single phase load

In a three-phase power supply system with single phase loads, if one of the modules fails, there is no loss of power as the power is distributed over the other modules that are still operational.

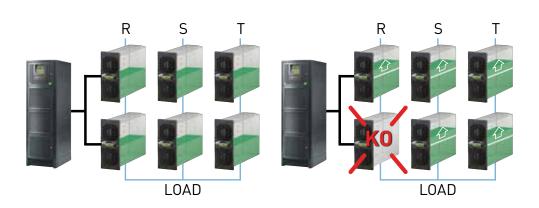


Phase redundancy

In a system with three-phase outputs, it is possible to create redundancy on each individual phase. If one of the power modules fails, the other modules for this phase take over from the faulty module.

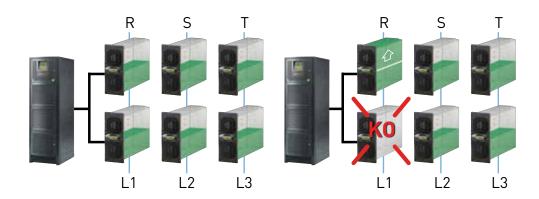

Control module redundancy

In UPS that include several control modules, the failure of one of the control modules results in the modules it controls being stopped. However continuity of service is assured by the automatic distribution of the lost power over the other modules.

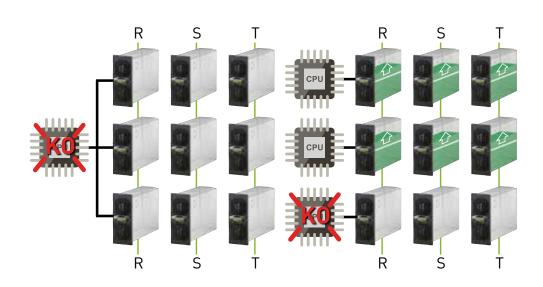



EXCLUSIVE ROTATING TOUCH SCREEN DISPLAY


The Keor MOD has a 10" touch screen display provides a simplified control panel packed with information, alerts and settings and is also equipped with interactive icons to make navigation and selection of the functions to be controlled quick and simple. The possibility of being able to rotate the Display inwards by 180° simplifies and speeds up the configuration and maintenance phases.

The display is positioned vertically so you have both the operating block diagram and the UPS layout with all the available information all on the same screen.



Decentralised bypass system

The decentralised bypass architecture reduces repair and maintenance time and costs. Each power module contains an indipendent bypass that, in the event of a failure, allows the remaining modules to simply to bypass mode, ensuring full functionality. The complete independence of the modules makes it possible to perform all maintenance and expansion phases in an extremely swift and simple way.

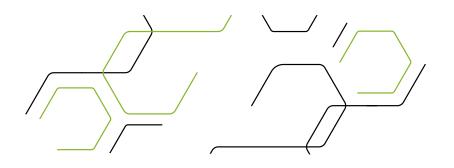

Attention to design

The elegance of the design and the skilful choice of materials give the Legrand UPS units a sleek and cutting-edge look.



MODULAR THREE-PHASE UPS



Trimod HE -

It consists of individual redundant and self-configuring single phase modules and has a nominal power rating of 10 to 80 kVA.

Thanks to the construction technology the various redundancy levels can be set to always guarantee maximum service continuity.



Trimod MCS -

The Trimod MCS CPS (Central Power Supply) is a single phase and three-phase centralised power supply system designed according to EN 50171 standards and represents the ideal solution for installation in buildings subject to fire safety standards and, specifically, to power emergency lighting systems. It can also be used to power emergency systems such as automatic fire extinguishing systems, emergency detection and alarm systems. smoke exhaust and carbon dioxide detection devices and specific safety systems in sensitive areas.



Keor MOD

It is an uninterruptible power supply based on three phase power modules, extremely compact and easy to handle. It delivers a nominal power from 25 to 250 kVA, it can be connected in parallel with other units up to 600 kVA.

Models up to 125 kVA have internal batteries for 5 minute backup time at 100% load.

Keor MOD integrates perfectly with the most critical applications such as Data Centers.



Trimod HE

Modular three-phase double conversion UPS VFI





3 108 71



3 104 42

Item		11	IP

	Power (kVA)	Back-up time (min.)	No. and Type Cabinet	Weight (kg)
	(KVA)	(111111.)	Cabinet	(Ng)
3 104 42	10	11	1A	167
3 104 43	10	21	1A	223
3 104 44	10	35	1A	279
3 104 02	10	49	1B	350
3 104 45	15	13	1A	220
3 104 46	15	21	1A	279
3 104 07	15	29	1B	350
3 104 47	20	9	1A	220
3 104 48	20	14	1A	279
3 104 13	20	20	1B	350
3 104 17	30	8	1B	325
3 104 19 + 3 107 63	40	8	2A	564
3 104 20 + 2 x 3 107 63	60	10	3A	830
3 110 08+3 104 78	80	9	2B	992

Cabinet A h=1370, Cabinet B h	=1650			
	Accessories			
3 108 69	Power module 3.4 kVA			
3 108 71	Power module 5 kVA			
3 108 73	Power module 6.7 kVA			
3 108 51	Additional battery charger module 15 A			
3 108 66	Kit of 3 power module covers			
3 111 12	Seismic kit			
	Pattery acceptance			
0.400.54	Battery accessories			
3 108 54	Kit of 4 empty battery drawers			
3 111 13	Kit of 4 battery drawers 9 Ah			
3 111 14	Kit of 4 battery drawers 9 Ah long life			
3 109 29	Kit for separate batteries (only for 60-80 kVA)			
	Additional empty battery cabinet			
3 108 05	16-drawer modular battery cabinet			
3 108 06	20-drawer modular battery cabinet			
0 100 00	20 diane: modular sallery salemet			
	Additional battery cabinet with 9Ah			
3 107 60	4-drawer modular battery cabinet			
3 107 61	8-drawer modular battery cabinet			
3 107 62	12-drawer modular battery cabinet			
3 107 63	16-drawer modular battery cabinet			

NOTE: the stated backup times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.

20-drawer modular battery cabinet

Characteristics:

- Modular three-phase UPS
- Nover from 1 to 80 kVA
 On-Line double conversion VFI-SS-111
 High efficiency up to 96%
 Output factor 1

- Adaptable, redundant and scalable solutions (IN/OUT 3-1 phase configuration)
 Quick and simple maintenance
 Low environmental impact

- Diagnostics, monitoring, historical data and parameters that can be set on the screen

 - Reduced foot print and dimensions
- Taller cabinet to extend backup time and standard configurations Multi control board function
- Dual Input Function
- Hot Swap system
- Menu available in 7 languages Frequency converter in 40-70Hz out 50/60Hz (selectable)
- Operations with genset
- Three independent phase outputs
- Bypass line input
- Eco Mode
- Output voltage adjustable in 1 volt steps (190÷245V)
- Bypass speed regulation
- Event log complete with date and time
- Global and historic data of each power module

Power cabinet

	Power (kVA)	No. of installable battery drawers	No. of phases	Type Cabinet	Weight (kg)
3 103 96	10	12	1-1 / 3-3 / 3-1 / 1-3	Α	120
3 103 97	10	16	1-1 / 3-3 / 3-1 / 1-3	В	155
3 104 08	15	12	1-1 / 3-3 / 3-1 / 1-3	Α	120
3 104 03	15	16	1-1 / 3-3 / 3-1 / 1-3	В	155
3 104 14	20	12	1-1 / 3-3 / 3-1 / 1-3	Α	120
3 104 09	20	16	3-3	В	155
3 104 18	30	-	3-3	Α	146
3 104 15	30	12	3-3	В	181
3 104 19	40	-	3-3	Α	146
3 104 20	60	-	3-3	Α	165
3 110 08	80	-	3-3	В	220

Power cabinets (empty)

			, ,		
	No. of installable power modules	No. of installable battery drawers	No. of phases	Type Cabinet	Weight (kg)
3 104 22	3 x 3.4 kVA	12	1-1 / 3-3 / 3-1 / 1-3	Α	85
3 104 31	3 x 3.4 kVA	16	1-1 / 3-3 / 3-1 / 1-3	В	98
3 104 23	3 x 5 o 6.7 kVA	12	1-1 / 3-3 / 3-1 / 1-3	Α	90
3 104 32	6 x 3.4 kVA	12	1-1 / 3-3 / 3-1 / 1-3	В	102
3 104 33	3 x 5 o 6.7 kVA	16	1-1 / 3-3 / 3-1 / 1-3	В	102
3 104 24	6 x 5 kVA	-	3-3	Α	80
3 104 25	6 x 5 kVA	-	1-1/3-3/3-1/1-3	Α	84
3 104 34	6 x 5 kVA	12	3-3	В	104
3 104 26	6 x 6.7 kVA	-	3-3	Α	80
3 104 27	9 x 6.7 kVA	-	3-3	Α	90

	Power cabinets with MULTI CONTROL BOARD (empty)					
	No. of installable power modules	No. of installable battery drawers	No. of phases	Type Cabinet	Weight (kg)	No. of controls
3 104 68	6 x 3.4 - 5 - 6.7 kW	-	1-1 / 3-3 / 3-1 / 1-3	Α	85	2
3 104 69	6 x 5 kVA	12	3-3	В	106	2
3 104 71	6 x 6.7 kVA	-	3-3	Α	82	2
3 104 72	9 x 6.7 kVA	-	3-3	Α	91	3
3 104 73	12 x 6.7 kVA	-	3-3	В	120	4



For the choice of communication accessories, see the dedicated section of

3 107 64



Trimod HE

Modular three-phase double conversion UPS VFI

Characteristics

General Characteristics	3 103 96 3 103 97	3 104 03 3 104 08	3 104 09 3 104 14	3 104 15* 3 104 18* 3 104 69	3 104 19 3 104 71	3 104 20 3 104 72	3 104 73 3 110 08
Nominal power (kVA)	10	15	20	30	40	60	80
Active power (kW)	10	15	20	30	40	60	80
Module power (kVA)	3.4	5	6.7	5	6.7	6.7	6.7
Technology	0.1			ole Conversio			0.1
System				ble and redur			
Input specifications		IVIOU	ана, ехранаа	bic and read	iddill Ol O Sy	310111	
Input voltage		400, 415 3F+ 220, 230, 240			380, 400, 41	5 3F+N+PE	
Input frequency	(0			Hz (43,0 ÷ 68	3.4 Hz)		
	400V +15%	/-20% - 230V	+15%/-20%		400V +1	5%/-20%	
THD Input current	1001 1070	2070 2001		3% (at full loa		2707 2070	
Compatibility with genset				Yes	,		
Input Power Factor				> 0.99			
Output Specifications				> 0.99			
Output Specifications Output voltage	380, 4	400, 415 3F+ 220, 230, 240	·N+PE		380, 400, 41	5 3F+N+PE	
Efficiency	(0		<i></i>	Up to 96%			
Efficiency in Eco Mode				99%			
Nominal output frequency	50	/60 Hz coloci	table by the u	ser ± 0,1% (s	standard) ±1	1 % (oxtand	od)
Peak factor	30.	OU LIZ SEIECI	able by the t	3:1	stariuaru), ± i	4 /0 (EXIETIO	eu)
Waveform				Sinusoidal			
Output Voltage Tolerance				±1%			
THD Output Voltage				< 1%			
Overload capacity				115%, 60 sec			
Bypass	Automati	c bypass (sta	atic and elect	romechanical) and manua	l maintenand	e bypass
Batteries							
Battery module				Plug & Play			
Battery series type/voltage			VRLA	A - AGM /240	Vd.c.		
Back-up time				Configurable			
Battery charger		Smart	Charge Tech	nology. 3-sta	ge advanced	l cycle	
Independent battery configuration		No			Yes		Yes with KI
Communication and management							
Screen and signalling		4 20 multi-colou	-character ro r LED status i	ws, 4 menu n indicator, alar	avigation but	tons, stic signals	
Communication ports	2 R						
		5232 DOMS. 1	logic level p	ort. 5 floating	contact port	s. 1 interface	slot
<u> </u>	210	5232 ports, 1		ort, 5 floating O auxiliary co		s, 1 interface	slot
Back feed protection	210	5232 ports, 1		O auxiliary co		s, 1 interface	slot
Back feed protection Emergency Power Off (EPO)	211	5232 ports, 1		O auxiliary co Yes		s, 1 interface	slot
Back feed protection Emergency Power Off (EPO) Remote control	211	5232 ports, 1		O auxiliary co		s, 1 interface	slot
Back feed protection Emergency Power Off (EPO) Remote control Mechanical characteristics	211	5232 ports, 1		O auxiliary co Yes Available		s, 1 interface	slot
Back feed protection Emergency Power Off (EPO) Remote control Mechanical characteristics Height A-B (mm)	211			O auxiliary co Yes Available 1370 - 1650	ontact		
Back feed protection Emergency Power Off (EPO) Remote control Mechanical characteristics Height A-B (mm) Width (mm)	2111	414		O auxiliary co Yes Available 1370 - 1650 414	ontact 414	414	414
Back feed protection Emergency Power Off (EPO) Remote control Mechanical characteristics Height A-B (mm) Width (mm) Depth (mm)	2111	414 628		O auxiliary co Yes Available 1370 - 1650 414 628	414 628	414 628	414 628
Back feed protection Emergency Power Off (EPO) Remote control Mechanical characteristics Height A-B (mm) Width (mm) Depth (mm) Number of Installed Power Modules		414 628 3	NC/N	O auxiliary co Yes Available 1370 - 1650 414 628 6	ontact 414	414	414
Back feed protection Emergency Power Off (EPO) Remote control Mechanical characteristics Height A-B (mm) Width (mm) Depth (mm) Number of Installed Power Modules Installable battery drawers (A-B)	Up	414 628 3 to 12 - Up to	NC/N	O auxiliary co Yes Available 1370 - 1650 414 628 6 Up to 0 - 12	414 628 6	414 628 9	414 628 12
Back feed protection Emergency Power Off (EPO) Remote control Mechanical characteristics Height A-B (mm) Width (mm) Depth (mm) Number of Installed Power Modules Installable battery drawers (A-B) Net weight A-B (kg)	Up	414 628 3 to 12 - Up to	NC/N	O auxiliary co Yes Available 1370 - 1650 414 628 6	414 628 6	414 628 9	414 628 12
Back feed protection Emergency Power Off (EPO) Remote control Mechanical characteristics Height A-B (mm) Width (mm) Depth (mm) Number of Installed Power Modules Installable battery drawers (A-B) Net weight A-B (kg) Ambient Conditions	Up	414 628 3 to 12 - Up to	NC/N 16 age, where the	O auxiliary converse Available 1370 - 1650 414 628 6 Up to 0 - 12 here are the warms	414 628 6 -	414 628 9	414 628 12
Back feed protection Emergency Power Off (EPO) Remote control Mechanical characteristics Height A-B (mm) Width (mm) Depth (mm) Number of Installed Power Modules Installable battery drawers (A-B) Net weight A-B (kg) Ambient Conditions Operating temperature/humidity	Up	414 628 3 to 12 - Up to	NC/N 16 age, where the	O auxiliary converse Available 1370 - 1650 414 628 6 Up to 0 - 12 here are the way of the second of the seco	414 628 6 -	414 628 9	414 628 12
Back feed protection Emergency Power Off (EPO) Remote control Mechanical characteristics Height A-B (mm) Width (mm) Depth (mm) Number of Installed Power Modules Installable battery drawers (A-B) Net weight A-B (kg) Ambient Conditions Operating temperature/humidity Protection rating	Up	414 628 3 to 12 - Up to	NC/N 16 age, where the	O auxiliary converse Available 1370 - 1650 414 628 6 Up to 0 - 12 here are the way of the second of the seco	414 628 6 -	414 628 9	414 628 12
Back feed protection Emergency Power Off (EPO) Remote control Mechanical characteristics Height A-B (mm) Width (mm) Depth (mm) Number of Installed Power Modules Installable battery drawers (A-B) Net weight A-B (kg) Ambient Conditions Operating temperature/humidity Protection rating Noise at 1 m from the unit (dBA)	Up	414 628 3 to 12 - Up to	NC/N 16 age, where the	O auxiliary converse Available 1370 - 1650 414 628 6 Up to 0 - 12 here are the way of the second of the seco	414 628 6 -	414 628 9	414 628 12
Back feed protection Emergency Power Off (EPO) Remote control Mechanical characteristics Height A-B (mm) Width (mm) Depth (mm) Number of Installed Power Modules Installable battery drawers (A-B) Net weight A-B (kg) Ambient Conditions Operating temperature/humidity Protection rating Noise at 1 m from the unit (dBA) Estimated content of circular economy derived materials	Up	414 628 3 to 12 - Up to	NC/N 16 age, where the	O auxiliary converse Available 1370 - 1650 414 628 6 Up to 0 - 12 here are the way of the second of the seco	414 628 6 -	414 628 9	414 628 12
Back feed protection Emergency Power Off (EPO) Remote control Mechanical characteristics Height A-B (mm) Width (mm) Depth (mm) Number of Installed Power Modules Installable battery drawers (A-B) Net weight A-B (kg) Ambient Conditions Operating temperature/humidity Protection rating Noise at 1 m from the unit (dBA) Estimated content of circular economy derived materials Recyclability rate calculated using the method described in technical report IEC/TR 62635**	Up	414 628 3 to 12 - Up to	NC/N 16 age, where the	O auxiliary converse Available 1370 - 1650 414 628 6 Up to 0 - 12 here are the way of the second of the seco	414 628 6 -	414 628 9	414 628 12
Back feed protection Emergency Power Off (EPO) Remote control Mechanical characteristics Height A-B (mm) Width (mm) Depth (mm) Number of Installed Power Modules Installable battery drawers (A-B) Net weight A-B (kg) Ambient Conditions Operating temperature/humidity Protection rating Noise at 1 m from the unit (dBA) Estimated content of circular economy derived materials Recyclability rate calculated using the method described in technical report IEC/TR 62635**	Up	414 628 3 to 12 - Up to	NC/N 16 age, where the	O auxiliary co Yes Available 1370 - 1650 414 628 6 Up to 0 - 12 here are the w	414 628 6 -	414 628 9	414 628 12
Back feed protection Emergency Power Off (EPO) Remote control Mechanical characteristics Height A-B (mm) Width (mm) Depth (mm) Number of Installed Power Modules Installable battery drawers (A-B) Net weight A-B (kg) Ambient Conditions Operating temperature/humidity Protection rating Noise at 1 m from the unit (dBA) Estimated content of circular economy derived materials Recyclability rate calculated using the method described in technical report IEC/TR 62635**	Up	414 628 3 to 12 - Up to e previous p	NC/N 0.16 age, where the control of	O auxiliary co Yes Available 1370 - 1650 414 628 6 Up to 0 - 12 here are the w	414 628 6 - veights of the	414 628 9 - e various con	414 628 12
Back feed protection Emergency Power Off (EPO) Remote control Mechanical characteristics Height A-B (mm) Width (mm) Depth (mm) Number of Installed Power Modules Installable battery drawers (A-B) Net weight A-B (kg) Ambient Conditions Operating temperature/humidity Protection rating Noise at 1 m from the unit (dBA) Estimated content of circular economy derived materials Recyclability rate calculated using the method described in technical report IEC/TR 62635** Certifications	Up	414 628 3 to 12 - Up to e previous p	NC/N 0.16 age, where the control of	O auxiliary con Yes Available 1370 - 1650 414 628 6 Up to 0 - 12 here are the way or - 95% non con IP20 58-62 37% 84%	414 628 6 - veights of the	414 628 9 - e various con	414 628 12
Back feed protection Emergency Power Off (EPO) Remote control Mechanical characteristics Height A-B (mm) Width (mm) Depth (mm) Number of Installed Power Modules Installable battery drawers (A-B) Net weight A-B (kg) Ambient Conditions Operating temperature/humidity Protection rating Noise at 1 m from the unit (dBA) Estimated content of circular economy derived materials Recyclability rate calculated using the method described in technical report IEC/TR 62635** Certifications	Up Refer to th	414 628 3 to 12 - Up to e previous p	NC/N 0 16 age, where th 0 - 40°C / 0	O auxiliary con Yes Available 1370 - 1650 414 628 6 Up to 0 - 12 here are the way or - 95% non con IP20 58-62 37% 84%	414 628 6 - veights of the ondensing	414 628 9 - e various con	414 628 12 - figurations
Back feed protection Emergency Power Off (EPO) Remote control Mechanical characteristics Height A-B (mm) Width (mm) Depth (mm) Number of Installed Power Modules Installable battery drawers (A-B) Net weight A-B (kg) Ambient Conditions Operating temperature/humidity Protection rating Noise at 1 m from the unit (dBA) Estimated content of circular economy derived materials Recyclability rate calculated using the method described in technical report IEC/TR 62635** Certifications Standards Services	Up Refer to the	414 628 3 to 12 - Up to e previous p	NC/N o 16 age, where the o - 40°C / 0	O auxiliary converse Available 1370 - 1650 414 628 6 Up to 0 - 12 here are the way or - 95% non converse are the way or - 95% non converse are way or	414 628 6 - veights of the ondensing 040-3, EN 62	414 628 9 - e various con	414 628 12 - figurations

38

^{*} Standard configurations with 3-3 distribution (multi IN/OUT settings available upon request)
** This value is based on data collected from a technological channel operating on an industrial basis. It does not pre-validate the effective use of this channel for end-of-life of this product.



Trimod HE

Long backup times table



Modular battery cabinet with up to 20 battery drawers installable Total - 100 Batteries



Non modular battery cabinet up to 20 battery drawers installable*

Trimod HE	Battery cabinet type	Nominal power (kVA)	Back-up time	Dimensions HxWxD (mm)	Weight (kg)
3 104 44 + 3 107 61	modular	10	78	2 x 1370 x 414 x 628	472
3 104 46 + 3 107 60	modular	15	33	2 x 1370 x 414 x 628	413
3 104 08 + 3 104 78	non modular	15	110 *	1370 x 414 x 628 + 1635 x 600 x 800	902
3 104 46 + 3 107 63	modular	15	57	2 x 1370 x 414 x 628	550
3 104 48 + 3 107 62	modular	20	35	2 x 1370 x 414 x 628	572
3 104 14 + 3 104 78	non modular	20	82 *	1370 x 414 x 628 + 1635 x 600 x 800	865
3 104 18 + 3 107 63	modular	30	12	2 x 1370 x 414 x 628	434
3 104 18 + 3 104 78	non modular	30	50 *	1370 x 414 x 628 + 1635 x 600 x 800	890
3 104 18 + 2 x 3 104 78	non modular	30	110 *	1370 x 414 x 628 + 2 x 1635 x 600 x 800	1645
3 104 19 + 2 x 3 107 63	modular	40	20	3 x 1370 x 414 x 628	801
3 104 19 + 3 108 10	non modular	40	33 *	1370 x 414 x 628 + 1635 x 600 x 800	925
3 104 19 + 2 x 3 104 78	non modular	40	82 *	1370 x 414 x 628 + 2 x 1635 x 600 x 800	1700
3 104 19 + 3 x 3 104 78	non modular	40	120 *	1370 x 414 x 628 + 3 x 1635 x 600 x 800	2430
3 104 19 + 3 x 3 107 64	modular	40	40	1370 x 414 x 628 + 3 x 1650 x 414 x 628	439
3 104 19 + 4 x 3 107 64	modular	40	60	1370 x 414 x 628 + 4 x 1650 x 414 x 628	1663
3 104 20 + 2 x 3 107 64	modular	60	15	1370 x 414 x 628 + 2 x 1650 x 414 x 628	942
3 104 20 + 4 x 3 107 63	modular	60	27	5 x 1370 x 414 x 628	1579
3 104 20 + 3 104 78	non modular	60	17 *	1370 x 414 x 628 + 1635 x 600 x 800	952
3 104 20 + 2 x 3 104 78	non modular	60	50 *	1370 x 414 x 628 + 2 x 1635 x 600 x 800	1715
3 104 20 + 3 x 3 104 78	non modular	60	80 *	1370 x 414 x 628 + 3 x 1635 x 600 x 800	2474
3 104 20 + 4 x 3 104 78	non modular	60	110 *	1370 x 414 x 628 + 4 x 1635 x 600 x 800	3234
3 110 08 + 2 x 3 104 70	non modular	80	20	1650X414X628+2X1635X600X800	1622
3 110 08 + 2 x 3 104 78	non modular	80	30	1650X414X628+2X1635X600X800	1782
3 110 08 + 3 x 3 104 78	non modular	80	47	1650X414X628+3X1635X600X800	2572
3 110 08 + 4 x 3 104 78	non modular	80	67	1650X414X628+4X1635X600X800	1782

* Configurations with long life battery cabinets.
310470 LONG LIFE BATTERY CABINET MODEL A - 710 kg - 600x800x1635 mm
310478 LONG LIFE BATTERY CABINET MODEL b - 790 kg - 600x800x1635 mm

NOTE: the stated backup times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.



Trimod MCS

CPS Modular three-phase double conversion VFI

EN STANDARD 50171







3 110 02

- **Characteristics:** Modular single-phase and three-phase CPS
 Power from 3 to 80 kVA
- Conforms to EN-50171 Standards

- On-Line double conversion VFI-SS-111
 High efficiency up to 96%
 Output factor 1
 Adaptable, redundant and scalable solutions (IN/OUT 3-1 phase configuration)
- Quick and simple maintenance
- Low environmental impact
- Diagnostics, monitoring, historical data and parameters that can be set Diagnostics, frontening, instance data and parameters on the screen
 Reduced foot print and dimensions
 Taller cabinet to extend backup time and standard configurations
 Pre-configured solutions with 1h backup time
 Dual input function (Bypass line input)

 Let Sucan exetam

- Hot Swap system

- нот swap system
 Continuous operations at up to 120% of the load
 Protection against battery pole inversion
 Output configurable from the display as PERMANENT
 or NON PERMANENT
 Menu available in 7 languages
 Frequency converter in 40-70Hz out 50/60Hz (selectable)
 Operations with genset
 Three independent phase outputs

- Three independent phase outputs
 Eco Mode
 Bypass speed regulation
 Event log complete with date and time
 Global and historic data of each power module

Item	Trimod MCS					
	Model	Autonomy according to EN50171	No. and Type Cabinet	IN-OUT factory settings		
3 109 90	3	1h	1A	1-1		
3 109 91	5	1h	1A	1-1		
3 109 92	7	1h	1B	1-1		
3 109 93 + 3 106 18	10	1h	1B	3-3		
3 109 94 + 3 106 19	15	1h	1B	3-3		
3 109 95 + 3 104 78	20	1h	1A	3-3		
3 109 96 + 2 x 3 104 70	30	1h	1A	3-3		
3 109 97 + 2 x 3 104 78	40	1h	1A	3-3		
3 109 98 + 3 x 3 104 78	60	1h	1A	3-3		
3 109 99 + 4 x 3 104 78	80	l 1h	1B	3-3		

Cabinet A h=1370, Cabinet B h=1650



3 108 71



3 108 75

Item	Accessories
3 108 69	Output module 3.4 kVA
3 108 71	Output module 5 kVA
3 108 73	Output module 6.7 kVA
3 108 66	Kit of 3 power module covers
	Battery accessories
3 111 14	Kit 4 drawers battery 9 Ah long life
	Additional empty battery cabinet
3 110 07	16-drawer modular battery cabinet
3 106 16	20-drawer modular battery cabinet
	Additional battery cabinet with batteries
	Long Life
3 106 18	Modular battery cabinet with 3KB for CPS 10 KVA
3 106 19	Modular battery cabinet with 5 KB for CPS 15 KVA
3 104 70	Battery cabinet for CPS type A
3 104 78	Battery cabinet for CPS type B

Item	TRIMOD MCS (Empty CPS Cabinets)
110111	Trained mod (Empty of a dubinets)

	· · · · · · · · · · · · · · · · · · ·		,		
	N° of installable power modules	N° of installable battery drawers	No. of phases	Type Cabinet	Weight (kg)
3 110 00	up to 3 to 3.4 kVA	12	1-1 / 3-3 / 3-1 / 1-3	Α	86
3 110 01	up to 3 to 6.7 kVA	12	1-1 / 3-3 / 3-1 / 1-3	Α	89
3 110 02	up to 3 to 6.7 kVA	16	1-1 / 3-3 / 3-1 / 1-3	В	103
3 110 03	up to 6 to 5 kVA	-	1-1 / 3-3 / 3-1 / 1-3	Α	85
3 110 04	up to 6 to 6.7 kVA	-	3-3	Α	82
3 110 05	up to 9 to 6.7 kVA	-	3-3	Α	91
3 110 06	up to 12 to 6.7 kVA	-	3-3	В	120

NOTE: the stated backup times are estimated and may vary according to the load characteristics, operating conditions and environment. For the choice of communication accessories, see the dedicated section of this catalogue.

Trimod MCS

CPS Modular three-phase double conversion VFI

General Characteristics	3 109 90	3 109 91	3 109 92	3 109 93+	3 109 94+	3 IU9 93T	3 109 96+ 2x	3 109 97+ 2x	3 109 98+ 3x	3 109 99 4x
				3 106 18	3 106 19	3 104 78	3 104 70	3 104 78		
Nominal power (kVA)	3	5	6.7	10	15	20	30	40	60	80
Active power (kW)	3	5	6.7	10	15	20	30	40	60	80
Active power according to EN50171 (kW)	2.88	4.16	5.58	8	12.5	16.7	25	33.3	50	66.7
Technology						nversion VF				
System			Mod	dular, expa	ndable and	d redundar	nt UPS sys	tem		
nput specifications					0 400 44	5.05 · N · D	_			
Input voltage Input frequency	220,23	30,240 1F-	+N+PE		(o 220, 23	5 3F+N+PE 0, 240 1F) ,0 ÷ 68,4 F		380, 40	00, 415 3F	+N+PE
Input requerity Input voltage range	230)V +15%/-2	20%			- 230V +15		400	V +15%/-2	20%
THD Input current	230	JV 1 13 /0/-2	20 70	400V 1	< 3% (at		707-20 70	400	10 110 707-2	20 70
Compatibility with power supply units						es				
Input power factor					> 0					
Output Specifications										
Output voltage	220,2	30,240 1F-	+N+PE	38	0, 400, 41: (o 220, 23	5 3F+N+PE 0, 240 1F)	= *	380, 40	00, 415 3F	+N+PE
Efficiency					Up to	96%				
Efficiency in Eco Mode					99	9%				
Nominal output frequency		50	/60 Hz sele	ectable by	the user ±	2 % (stand	ard), ±14	% (extende	ed)	
Peak factor					3	:1				
Waveform					Sinus					
Output voltage tolerance					±1					
THD output voltage					< '					
Overload capacity				ntinuous, 1						
Bypass		Automatic	bypass (s	tatic and e	lectromeci	nanical) an	d manual	maintenan	ce bypass	
Batteries Potton modulo					Dlug	P. Dlov				
Battery module Type					Plug & Long					
Back-up time				1		as needed	٦)			
Battery charger		80% :	autonomy i	n 12h - Sm				advanced	cvcle	
Communication and management			,				,,			
Screen and signalling				:0-characte our LED stat						
Communication Ports		2 RS23	2 serial por	rts, 1 logic	level port,	5 floating of	contact po	rts, 1 interf	ace slot	
Back feed protection				N	C/NO auxi	liary contac	ct			
Emergency Power Off (EPO)						es				
Remote management					Avai	lable				
Mechanical characteristics					1050					1050
Dimensions HxWxD (mm)	1370 x 4	14 x 628	1650 x 414 x 628	1370 x 414 x 628	1650 x 414 x 628		1370 x 4	14 x 628		1650 x 414 x 628
Net weight kg	202.5	265.5	327.5	273.5	344.5	115	136	134	158.5	222
Battery cabinet dimensions HxWxD (mm)	-	-	-	1370x 414x 628	1650x 414x 628		60	0x 800x16	35	
Battery cabinet net weight (kg)	-	-	-	257	375	790	710		790	
Installable battery drawers	8	12	16	-	-	-	-	-	-	-
Ambient Conditions										
Operating temperature/humidity				0 - 40°0	C / 0 - 95%	non cond	ensing			
Protection rating					IP.	20				
Noise at 1 m from the unit (dBA)					58-	-62				
Conformity	T									
Certifications			EN	62040-1, E	N 62040-2	2, EN 62040)-3, EN 50	171		
Services						"DI 2 -	"		11	
Installation	L	Jser execu		ular archite						es
Maintenance Ease of management				ty of option						
			Advance	a diagnost	ic tunction	s via the to	lich scree	n display		



Keor MOD

UPS Modular three-phase double conversion VFI







3 104 80

General features:

- Just two cabinet configurations (up to 125 kW and up to 250 kW)
- Internal Backup time up to 125 KW
- UPS system capacity up to 600 kW
- Rotating 10" touch screen display
- Reduced battery charging times
- Double conversion efficiency up to 96.8% (power module efficiency)
- Efficiency in ECO mode up to 99%.
- Output power factor = 1
- Modular redundancy in N+1 configuration
- Controlled noise level
- Multicoloured status bar LED
- Parallelable system up to 24 power modules
- Hot-swappable modules
- Decentralised by-pass.
- Intelligence distributed between modules

- intelliger	ice distributed	a between modules					
Item	UPS - empty power cabinets						
	Power (kW)	Installable battery drawers	Distribution	Weight (kg)			
3 104 80	25 - 125	from 2 to 10 battery drawers	3-3	256			
3 104 81	25 - 250	-	3-3	233			
	UPS – power cabinet with seismic kit*						
				Weight (kg)			
3 111 19	Keor MOD 125 kW with seismic kit						
3 111 20	Keor MOD 2	50 kW with seismic kit		283			
	UPS – power cabinet with additional distribution						
				Weight (kg)			

3 111 17	Keor MOD 125 kW with additional distribution
3 111 18	Keor MOD 250 kW with additional distribution
	Accessories

3 106 75	25 kW power module
----------	--------------------

3 106 76 Empty battery blocks kit for 6 batteries (to be used in sets of 4 per drawer)

3 106 77 Kit of 2 EMPTY battery drawers

3 106 78 Kit of 4 battery blocks (6 x 9 Ah batteries)

3 106 79 Kit of 4 battery blocks (6 x 11 Ah batteries)

3 109 62 Kit of 4 battery blocks (6 x 9Ah Long Life batteries)

3 109 75 Parallel cable kit (1 kit every 2 cabinets - length 6m)

3 111 11 Top entry cable column

3 104 84 Empty modular battery cabinet up to 16 drawers

3 102 59 Sync kit for UPS (cable length 26 m)**

3 104 82 Battery temperature probe

3 109 65 Empty battery cabinet 70-93 Ah

3 109 67 Empty battery cabinet 105 Ah

* partially assembled at the factory

Examples of Keor MOD with accessories

Keor MOD 125 with seismic kit

Designed to maintain the structural integrity of units during and after seismic events.

Compliant to ASCE 7-16 and 2018 IBC with external laboratory certification.




Keor MOD 250 with seismic kit

Designed to maintain the structural integrity of units during and after seismic events. Compliant to ASCE 7-16 and 2018 IBC with external laboratory certification.




Keor MOD 125 with additional distribution

with integrated UPS switching devices.



Keor MOD 250 with additional distribution

with integrated UPS switching devices.




Keor MOD with top cable entry column

329

346

Designed to support top cabling to Keor MOD 125 and 250 kW in sites where the cabling is distributed through overhead cable trays.



Empty modular battery cabinet. Capacity up to 16 drawers

Designed to increase UPS backup time through hot swap battery drawers.



^{**} to create 2 synchronous but independent power lines (typical in Tier III, IV sustems and STS)

Keor MOD

UPS Modular three-phase double conversion VFI

Seneral specifications								
Nominal power (kVA)	25 50 75	100	125	150	175	200	225	250
Active power (kW)	25 50 75	100	125	150	175	200	225	250
Module power (kW)	23 30 13	100	2:		170	200		200
Classification		On-Line d			I-SS-111			
No. Power modules	1 2 3	4	5	6	7	8	9	10
System		Modular, expan						10
nput specifications		roadiai, oripari	addio di le	. rodarraar	0. 0 0 0 0			
Input voltage			400V 3F	+N+PE				
Input frequency		45-6	65 Hz (43.	0 ÷ 68.4 F				
Input voltage range				230V +15				
THD input current			< 3% (at	full load)				
Compatibility with power supply units			Ye	'S				-
Input power factor			> 0	.99				
Output Specifications								
Output voltage			380, 400), 415V				
Efficiency (power module)			Up to 9	96.8%				
System efficiency			Up to 9	96.5%				
Efficiency in Eco mode			99	%				
Nominal output frequency	50/60 Hz s	selectable by the	ne user ±´	% (stand	ard), ±14 °	% (extende	d)	
Crest factor			3:	1				
Waveform			Sinus	oidal				
Output voltage tolerance			±1	%				
THD output voltage		<(0.9% with	linear load	I			
Overload capacity		10 minutes	at 125%,	60 second	s at 150%			
Bypass	Automatic bypass	(static and ele	ectromech	anical) an	d manual ı	maintenand	e bypass	
Batteries								
Battery module			Plug 8	play				
Battery series type/voltage		VRLA	- AGM 12	V, 9 Ah - 1	1 Ah			
Autonomy			Config	urable				
Battery charger	S	mart charge te	echnology.	3-stage a	dvanced c	ycle		
Independent battery configuration	Yes, maximum 5 sets	of independer	nt batteries	s (configur	able as co	mmon or s	eparate un	its)
Communication and management								
Display				lour touch				
Communication ports		orts (one for ex					acts,	
	8 Out	tput floating co				ost port		
				iary contac	Cl .			
Back feed protection		IVC						
Back feed protection Emergency Power Off (EPO)		110	Ye					
Back feed protection Emergency Power Off (EPO) Cold start push-button		TVC	Ye Ye	'S				
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management		TVC	Ye	'S				
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management Mechanical characteristics		IVC	Ye Ye Avail	able				
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management Mechanical characteristics Height (mm)			Ye Ye Avail	able				
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management Mechanical characteristics Height (mm) Width (mm)		600 (900 for s	Ye Ye Avail 199 solutions v	s able 90 vith additio	nal colum	n)		
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management Mechanical characteristics Height (mm) Width (mm) Depth (mm)		600 (900 for s	Ye Ye Avail	s able 90 vith additio	nal colum			
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management Mechanical characteristics Height (mm) Width (mm) Depth (mm) Installable power modules	Up to 5	600 (900 for s	Ye Ye Avail 199 solutions v	s able 90 vith additio	nal columi	n) Up to 10		
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management Mechanical characteristics Height (mm) Width (mm) Depth (mm) Installable power modules Installable battery drawers	Up to 1	600 (900 for s	Ye Ye Avail 199 solutions v	s able 90 vith additio	nal columi	Up to 10		
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management Mechanical characteristics Height (mm) Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg		600 (900 for s	Ye Ye Avail 199 solutions v	s able 90 vith additio	nal columi			
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management Mechanical characteristics Height (mm) Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg Ambient Conditions	Up to 1	600 (900 for s	Ye Ye Avail 199 solutions v 100	s able 90 with additio		Up to 10		
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management Mechanical characteristics Height (mm) Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg Ambient Conditions Operating temperature/humidity	Up to 1	600 (900 for s	Yee Yee Avail 1999 solutions v 100	s able 90 with additio 00 non cond		Up to 10		
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management Mechanical characteristics Height (mm) Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg Ambient Conditions Operating temperature/humidity Protection rating	Up to 1	600 (900 for s	Ye Ye Avail 199 solutions v 100	s able 90 with additio 00 non cond		Up to 10		
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management Mechanical characteristics Height (mm) Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg Ambient Conditions Operating temperature/humidity Protection rating Maximum audible noise at 1 m from	Up to 1	600 (900 for s	Yee Yee Avail 1999 solutions v 100	s able 90 with addition 00 non cond		Up to 10		
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management Mechanical characteristics Height (mm) Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg Ambient Conditions Operating temperature/humidity Protection rating Maximum audible noise at 1 m from the unit (dBA)	Up to 1	600 (900 for s	Ye Ye Avail 199 solutions v 100 170 170 170 170 170 170 170 170 1	s able 90 with addition 00 non cond 20 65		Up to 10		
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management Mechanical characteristics Height (mm) Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg Ambient Conditions Operating temperature/humidity Protection rating Maximum audible noise at 1 m from the unit (dBA) Estimated content of circular economy derived materials	Up to 1	600 (900 for s	Yee Yee Avail 199 solutions v 100 2 / 0 - 95% IP2	s able 90 with addition 00 non cond 20 65		Up to 10		
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management Mechanical characteristics Height (mm) Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg Ambient Conditions Operating temperature/humidity Protection rating Maximum audible noise at 1 m from the unit (dBA) Estimated content of circular economy derived materials Recyclability rate calculated using the method described in technical report IEC/TR 62635*	Up to 1	600 (900 for s	Ye Ye Avail 199 solutions v 100 170 170 170 170 170 170 170 170 1	s able 90 with addition 00 non cond 20 65		Up to 10		
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management Mechanical characteristics Height (mm) Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg Ambient Conditions Operating temperature/humidity Protection rating Maximum audible noise at 1 m from the unit (dBA) Estimated content of circular economy derived materials Recyclability rate calculated using the method described in technical report IEC/TR 62635* Conformity	Up to 1 256	600 (900 for s	Ye Ye Avail 199 solutions v 100 6 / 0 - 95% IP2 50- 43	s able 90 with addition 00 non cond 20 65 %	ensing	Up to 10 — 233		
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management Mechanical characteristics Height (mm) Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg Ambient Conditions Operating temperature/humidity Protection rating Maximum audible noise at 1 m from the unit (dBA) Estimated content of circular economy derived materials Recyclability rate calculated using the method described in technical report IEC/TR 62635* Conformity Certifications	Up to 1 256	600 (900 for s	Ye Ye Avail 199 solutions v 100 6 / 0 - 95% IP2 50- 43	s able 90 with addition 00 non cond 20 65 %	ensing	Up to 10 — 233		
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management Mechanical characteristics Height (mm) Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg Ambient Conditions Operating temperature/humidity Protection rating Maximum audible noise at 1 m from the unit (dBA) Estimated content of circular economy derived materials Recyclability rate calculated using the method described in technical report IEC/TR 62635* Conformity Certifications Services	Up to 1 256	600 (900 for s 5 0 0 - 40°C	Yee Yee Avail 199 solutions v 100 6 / 0 - 95% IP2 50- 43 74	s able 90 with addition 00 non cond 20 65 % EN 62040-	ensing -3, EN 620	Up to 10 ————————————————————————————————————		
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management Mechanical characteristics Height (mm) Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg Ambient Conditions Operating temperature/humidity Protection rating Maximum audible noise at 1 m from the unit (dBA) Estimated content of circular economy derived materials Recyclability rate calculated using the method described in technical report IEC/TR 62635* Conformity Certifications Services	Up to 1 256 EI Modular ar	600 (900 for s 500 0 - 40°C	Yee Yee Avail 199 solutions v 100 170 170 170 170 170 170 170 170 170	s able 90 with addition 00 non cond 20 65 % EN 62040	ensing -3, EN 620 r modules	Up to 10 — 233 40-4 and batter	ies	
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management Mechanical characteristics Height (mm) Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg Ambient Conditions Operating temperature/humidity Protection rating Maximum audible noise at 1 m from the unit (dBA) Estimated content of circular economy derived materials Recyclability rate calculated using the method described in technical report IEC/TR 62635* Conformity Certifications Services Installation Maintenance	Up to 1 256 Et Modular ar Availab	0 - 40°C N 62040-1, EN	Yes Avail 199 solutions v 100 170 170 170 170 170 170 170 170 170	s able 90 with addition 00 non cond 20 65 % EN 62040- blay" powe provided	ensing -3, EN 620 r modules by the mar	Up to 10 — 233 40-4 and batter	ies	
Back feed protection Emergency Power Off (EPO) Cold start push-button Remote management Mechanical characteristics Height (mm) Width (mm) Depth (mm) Installable power modules Installable battery drawers Net weight kg Ambient Conditions Operating temperature/humidity Protection rating Maximum audible noise at 1 m from the unit (dBA) Estimated content of circular economy derived materials Recyclability rate calculated using the method described in technical report IEC/TR 62635* Conformity Certifications Services	Up to 1 256 Et Modular ar Availab	600 (900 for s 500 0 - 40°C	Yes Avail 199 solutions v 100 170 170 170 170 170 170 170 170 170	s able 90 with addition 00 non cond 20 65 % EN 62040- blay" powe provided	ensing -3, EN 620 r modules by the mar	Up to 10 — 233 40-4 and batter	ies	



The **Legrand conventional three-phase UPS** units range in power from 10 kVA to 4.8 MVA and feature double conversion on-line technology, latest generation micro processors for accurate and constant control of all measurements, and a power factor correction (PFC) circuit.

Transformer-free technology electronics for high quality energy output with up to 96.4% efficiency.

These uninterruptible power supplies are the result of an accurate combination of technology and design and deliver high performance, reliability and ease of use and maintenance.

The high efficiency and low environmental impact make them the ideal solution in various application fields, often characterised by critical conditions such as hospitals, industries, transport and the various tertiary sectors.

The products that are part of this version are:

Keor Compact - Keor T Evo - Keor HP -**Keor HPE - Keor XPE.**

















The supplied internal batteries, with a capacity of up to 80 kVA, avoid additional costs for the purchase of external battery cabinets, help reduce the space occupied and simplify installation.

Range from 10 kVA to 4.8 MVA High efficiency - up to 97.2% Power factor =1







0.54 m²
(60 kVA, 14')



INTERNAL BATTERY FIXTURES

Excellent battery management

The advanced battery charge and management functions improve performance and operating life over time.

Front internal access

Legrand conventional UPS are designed to be installed and maintained from the front.
All the manoeuvre switches and communication ports are installed on the front of the UPS.
Ease of access to all parts subject to maintenance significantly reduces machine repair times.



Parallelable system

It is possible to connect up to 6 identical power units in parallel depending on the power requirements. This achieves delivery of power levels of up to 4.8 MVA.

Scalability

The parallel connections of up to 6 UPS makes it possible to achieve different degrees of redundancy and maximum levels of continuity of service and safety of the system itself.





3.2 MVA

Keor HP -

It is a sturdy UPS unit, equipped with an internal isolation transformer making it suitable for use in high electrical disturbance environments. Its nominal powers of from 60 to 800 kVA makes it ideal for high power applications in tertiary, hospital, industry and transportation sectors.



Keor XPE

It is a complete scalable UPS system based on 250 or 300 kVA power units that can be combined with others to achieve the required power level (up to 2.1 MVA) or create redundant configurations.

Keor XPE It is the ideal solution for Data Center and high power applications.






The elegance of the design and the skilful choice of materials complete the performance and reliability features of this series of UPS units.

The new user-friendly and intuitive touch-screen displays and the hexagonal pattern, also seen in the ventilation grids, enhance the product, combining technology and design.



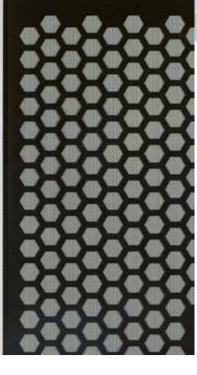



Keor T Evo

Its nominal powers of from 10 to 60 kVA provide a simple and compact solution for classic applications in tertiary, trade and industry sectors. Keor T Evo is scalable, parallelable and equipped with a display and multicoloured led bars that allow for swift UPS status checks.



Keor HPE is the perfect solution for critical medium and large power applications and is available from 60 to 600 kVA versions. Boasting attention to design and a smart display, it includes advanced battery charging and management features that guarantee top battery performance and maximum operating life.







With a rated power of 10-15-20 kVA, this is an easy-to-install UPS with wheels and colour touchscreen with user-friendly graphics and navigation windows. Thanks to its small dimensions, Keor Compact is ideal for installation even in small technical rooms. Parallel connections for redundant configurations make this UPS the perfect solution also for critical applications.



Keor Compact

Conventional UPS - On-line three-phase double conversion VFI



3 111 00

Item	UPS
	No

item	0. 0			
	Nominal power (kVA)	Power active (kW)	Dimensions W x D x H (mm)	Weight (kg)
3 111 00	10	9	260 x 850 x 890	74
3 111 01	10	9	260 x 850 x 890	149
3 111 02	15	13.5	260 x 850 x 890	76
3 111 03	15	13.5	260 x 850 x 890	166
3 111 04	20	18	260 x 850 x 890	76
3 111 05	20	18	260 x 850 x 890	176

Accessories

	Accessories	
	Description	Dimensions W x D x H (mm)
3 110 94	Empty Keor Compact battery cabinet	260 x 850 x 890
3 110 95	Keor Compact battery cabinet 10 kVA	260 x 850 x 890
3 110 96	Keor Compact battery cabinet 15 kVA	260 x 850 x 890
3 110 97	Keor Compact battery cabinet 20 kVA	260 x 850 x 890
3 110 98	Parallel system kit	
3 110 99	RS-485 MODBUS card	
3 111 06	Dry contact card	
3 110 86	Battery temperature probe	

Backup times table

		Power (kVA)	Back-up time (min)	No. of battery cabinets*
311101		10	11	0
311101 + 1 x 3	311095	10	50	1
311101 + 2 x 3	311095	10	87	2
311101 + 3 x 3	311095	10	126	3
311103		15	7	0
311103 + 1 x 3	311096	15	40	1
311103 + 2 x 3	311096	15	67	2
311103 + 3 x 3	311096	15	99	3
311105		20	6	0
311105 + 1 x 3	311097	20	28	1
311105 + 2 x 3	311097	20	57	2
311105 + 3 x 3	311097	20	81	3

^{* 0 =} UPS with internal batteries only.


Characteristics:


- PFC power-factor correction (input PF>0.99)
- 4.3" user friendly touch screen display
- Wide range of input voltages and frequencies
- Dual Input Cold Start
- Embedded backfeed protection
- Smart communication ports and SNMP management capability
- Parallelable system with up to 6 units
- Built-in battery for standard autonomy
 Extended backup time with battery cabinets
- Overload and short-circuit protection
- Powerful built-in loader

- RS232, dry contacts
 Compatibility with gensets
 Compact dimensions, lightweight and low noise
- Reduced footprint: 0.22 m²
- Wheels for ease of handling


Dimensions (mm)


Keor Compact 10 - 15 - 20 kVA





Battery cabinet





NOTE: the stated backup times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.

For the choice of communication accessories, see the dedicated section of this catalogue.



Keor Compact

Conventional UPS - On-line three-phase double conversion VFI

eral Characteristics	Keor Compact 10	Keor Compact 15	Keor Compact 20
Nominal power (kVA)	10	15	20
Active power (kW)	9	13.5	18
Technology	(On-Line Double Conversion VFI-SS	S-111
Waveform		Sinusoidal	
Architecture	Stand Alone or	Distributed with parallelable syste	em with up to 6 units
Efficiency		up to 95%	
Efficiency in ECO mode		up to 98.5%	
put		·	
Nominal input voltage		400V (3Ph+N+PE)	
Nominal voltage (Ph-Ph)	±2	0% @100% load, -40/+20% @50	% load
Input frequency		40-70 Hz	
THD Input current		<3% at full load	
Dual Input		yes	
Compatibility with Power Supply Units		yes	
Input Power Factor		>0.99	
utput		- 0.00	
		380, 400, 415V (3Ph+N+PE)	
Output voltage Output voltage tolerance		± 1% static load	
		/60 Hz (Adjustable from the front	nonol\
Nominal output frequency Output frequency tolerance		adjustable synch Mains for Bypas	' '
Peak factor	<u> </u>	3:1	55, ± 0.01/01166 Null
	Z20/ /		incor load)
THD Output voltage	<2% (with linear load), <5% (with non-li	near load)
Output power factor	00	0.9	t 1500/
Overload capacity	00 111	in at 110%, 10 min at 125%; 1 mir	
Bypass		Automatic and maintenance byp	ass
atteries			
Cold Start		yes	
Battery Type		VRLA	
Internal batteries		yes	
ommunication and management		4.0"	
Display	B0000 4	4.3" colour touch-screen displa	'
Communication ports	RS232, 4 programma	ble relay contacts, RS485 (option	ial), network interface slot
Backfeed protection		Integrated	
Alarms and signals		Alarms and audible warnings	3
Emergency Power Off (EPO)		yes	
Remote control		available	
echanical characteristics			
Ventilation	F	orced with fan from the front to the	e rear
Maximum heat dissipation (100% of the W load, battery recharging)	600	900	1300
Colour	RAL9017	(black-cabinet) RAL9003 (white -	control panel)
Dimensions W x D x H (mm)		260 x 850 x 890	
Weight (without battery) (kg)	74	76	76
Weight (with batteries) (kg)	149	166	176
mbient Conditions			
Operating temperature (°C)	0 - 40°C (recomme	nded temperature for longer usef	ul battery life: 20-25°C)
Relative humidity		20-95% (not condensing)	
Protection rating		IP20	
Noise at 1 m from the unit (dBA)		< 52	
Estimated content of circular economy derived materials		≃ 39%	
ecyclability rate calculated using the method described in technical report IEC/TR 62635*		≃ 71%	
onformity			
		1, IEC/EN 62040-2, IEC/EN 62040	10 IEC/EN 00040 4



Keor T Evo

UPS - On-line three-phase double conversion VFI







Keor T Evo 10-30

Keor T Evo 10-30

Keor T Evo 40-60


- Characteristics:
 Output from 10 to 60 kVA
 New Keor T Eco up to 20 kVA and power factor 1
 Three-phase UPS
 3 level Switching technology
 IGBT Rectifier and inverter


- IGBT Rectiller and inverter
 High efficiency
 Digital signal processor (DSP)
 High Input Power Factor Correction
 3.5" TFT touch screen panel
 High output Power Factor
 Low input and output total harmonic distortion values (THD)
- Compatibility with gensets Parallelable system with up to 4 units Communication ports

ш	ь	0
u	_	•


	Nominal power (kVA)	Back-up time (min.)	Dimensions (mm)	Weight (kg)
3 110 20	10	0	1345 x 400 x 800	122
3 110 21	10	24	1345 x 400 x 800	261
3 110 22	10	37	1345 x 400 x 800	283
3 110 23	10	57	1650 x 400 x 800	426
3 110 24	15	0	1345 x 400 x 800	127
3 110 25	15	14	1345 x 400 x 800	268
3 110 26	15	22	1345 x 400 x 800	288
3 110 27	15	33	1650 x 400 x 800	431
3 110 28	20	0	1345 x 400 x 800	134
3 110 29	20	10	1345 x 400 x 800	275
3 110 30	20	15	1345 x 400 x 800	296
3 110 31	20	37	1650 x 400 x 800	477
3 110 32	30	0	1345 x 400 x 800	141
3 110 33	30	10	1345 x 400 x 800	302
3 110 34	30	13	1650 x 400 x 800	441
3 110 35	30	22	1650 x 400 x 800	484
3 110 36	40	0	1650 x 600 x 900	238
3 110 37	40	10	1650 x 600 x 900	538
3 110 38	40	15	1650 x 600 x 900	573
3 110 39	40	25	1650 x 600 x 900	740
3 110 40	60	0	1650 x 600 x 900	258
3 110 41	60	10	1650 x 600 x 900	590
3 110 42	60	15	1650 x 600 x 900	755

NOTE: the stated backup times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.





Keor T Evo 10-15-20-30 with external battery cabinet



Keor T Evo 40-60 with external battery cabinet





Item	Keor T E	VO 208 V		
	Nominal power (kVA)	Active Power (kW)	Dimensions H x W x D (mm)	Net weight (kg)
3 101 32	5	4,5	1345 x 400 x 800	118
3 101 33	7,5	6,75	1345 x 400 x 800	132
3 101 34	10	9	1345 x 400 x 800	134
3 102 78	15	13,5	1345 x 400 x 800	140
3 102 79	20	18	1650 x 600 x 900	255
3 102 96	30	27	1650 x 600 x 900	277

Accessories

3 109 18	Battery cabinet empty (up to 60 blocks 55 Ah)
3 109 21	Internal cables kit for battery cabinet empty (for 60 blocks 55 Ah)
3 109 11	Battery drawers kit for Keor T Evo 10-30 kVA (up to 60 blocks 7-9 Ah)
3 109 12	Battery drawers kit for Keor T Evo 40-60 kVA (up to 60 blocks 7-9 Ah)
3 109 13	Internal battery cables kit for battery drawers Keor T Evo 10-30 kVA
3 109 14	Internal battery cables kit for battery drawers Keor T Evo 40-60 kVA
3 109 15	Parallel kit/UPS (PCB + 5 m cable)
3 109 87	Keor T Evo Battery Cabinet A
3 109 88	Keor T Evo Battery Cabinet B*



^{*} To be used in multiples of 2.

Keor T Evo

UPS - On-line three-phase double conversion VFI

Model 3Ph 400V (380-400-415V) 3Ph	Keor T Evo 10	Keor T Evo 15	Keor T Evo 20	Keor T Evo 30	Keor T Evo 40	Keor T Evo 60	
Nominal power (kVA)	10	15	20	30	40	60	
Active power (kW)	10	15	20	30	40	60	
3Ph version 208V (200-208-220V)	Keor T Evo 208V 5	Keor T Evo 208V 7,5	Keor T Evo 208V 10	Keor T Evo 208V 15	Keor T Evo 208V 20	Keor T Evo 208 30	
Nominal power (kVA)	5	7,5 10 15		20	30 27		
Active power (kW)	4,5	4,5 6,75 9 13,5 18					
General characteristics			2 " 1 11		4		
Technology		(On-line double con		1		
Waveform		Ctoro		soidal			
Architecture Input Characteristics		Stand	d alone or distribut	ed parallel up to 6	units		
Input characteristics Input voltage		400V (3Ph+N+PE)* / 200	-208-220V (3Ph+N			
Input frequency		4007 (-200-220V (31 11 11) 55 Hz	· · · · · · · · · · · · · · · · · · ·		
Input voltage range (Ph-Ph)			±20%*/				
THD of input current				full load			
Compatibility with diesel generators				es			
Input power factor			>0				
Output characteristics							
Output voltage	380, 400), 415V (3Ph+N+P	E)* / 200-208-220\	/ (3Ph+N+PE)** (A	djustable from froi	nt panel)	
Efficiency		<u> </u>		96% *			
Efficiency in ECO mode			up to	98,5%			
Output frequency (nominal)		5	60 /60 Hz (Adjustat	ole from front pane	1)		
Output frequency tolerance		±0	,1%Synch with Ma	ains; ±0,01% Free	Run		
Crest factor							
THD of output voltage	< 2% at full linear load						
Output power factor	1* / 0,9**						
Output voltage tolerance	± 1%						
Overload capability							
By-pass		Bui	Itin automatic and	mainteinance byp	ass		
Batteries							
Battery type			VRLA – AGM M				
Internal batteries				es			
Battery test				tic or Manual			
Battery recharge profile			IU (DIN	141773)			
Communication and management		Touch sere	on lad bar status	livo evpoptio viow	for roal time		
LCD Display Communication Ports			en, led bar status, i, GenSet, Program				
Back feed protection			al back feed prote				
Audible alarm		IIILEITI		s and warnings	Tidard		
Net interface slot			optional S				
Emergency Power Off (EPO)			•	es			
Remote management			Avai				
Physical characteristics			7				
Dimensions H x W x D (mm)		1345/1650 x 1345 x 40	< 400 x 800* 00 x 800**		1650 x 6	00 x 900	
Dimensions battery cabinet H x W x D (mm)				300 x 900			
Ambient conditions							
Operating temperature (°C)			0-	40			
Relative humidity (%)	y (%) 20-95% not condensing						
Protection index			IP	20			
Noise at 1 m (dBA)		<	58		<	60	
Estimated content of circular economy derived materials			39	9%			
Recyclability rate calculated using the method described in technical report IEC/TR 62635***			71	1%			
Compliance							
Reference product standards		[EN 62040-1, EN 62	2040-2, EN 62040-	3		

^{***} for 3Ph 208V Version
*** This value is based on data collected from a technological channel operating on an industrial basis. It does not pre-validate the effective use of this channel for end-of-life of this product.



Keor HP

Conventional UPS - Three-phase On-line double conversion VFI





Keor HP 100

Keor HP 400

- Characteristics:
 60-800kVA Capacity
 3 Phase Input / 3 Phase Output
 IGBT-Based Rectifier and Inverter

- IGB I-based Rectifier and Inverter
 High Efficiency
 Digital Signal Processor (DSP)
 High Input Power Factor (PFC)
 High Output Power Factor
 Batteries recharging compensation with temperature
 Inverter Isolation Transformer
 Low Input and Output Total Harmonic Distortion (THD)
 Generation compliant
- Genset operation compliant
 On Site Modular Paralleling Capability up to 6 Units
 Availability of Different Communication types
 Optimized cooling system

Model	UPS	(without	batteries)

	Nominal power (kVA)	Active power (kW)	Dimensions H x W x D (mm)	Net weight (kg)
Keor HP 60	60	54	1670 x 815 x 825	570
Keor HP 80	80	72	1670 x 815 x 825	600
Keor HP 100	100	90	1670 x 815 x 825	625
Keor HP 125	125	112,5	1670 x 815 x 825	660
Keor HP 160	160	144	1670 x 815 x 825	715
Keor HP 200	200	180	1905 x 1220 x 870	970
Keor HP 250	250	225	1905 x 1220 x 870	1090
Keor HP 300	300	270	1905 x 1220 x 870	1170
Keor HP 400	400	360	1920 x 1990 x 965	1820
Keor HP 500	500	450	2020 x 2440 x 950	2220
Keor HP 600	600	540	2020 x 2440 x 950	2400
Keor HP 800	800	720	1920 x 3640 x 950	3600

Options

Description

Empty battery cabinet with cables and protection

Batteries 5 years / 10 years life time in cabinets or racks Battery switch box with protection:

Battery monitoring system


BY PASS insulation transformer

External maintenance by-pass

Top entry cable cabinet

Remote control panel



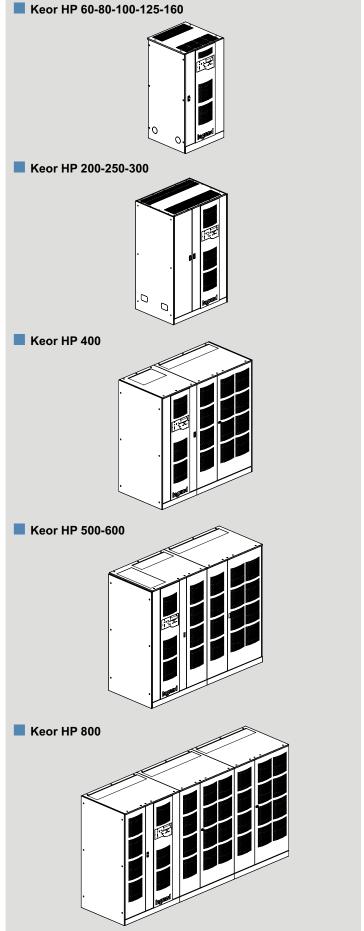

For the choice of communication accessories, see the dedicated section of this catalogue.



Keor HP

Conventional UPS - Three-phase On-line double conversion VFI

eneral characteristics	60	80	100	125	160	200	250	300	400	500	600	800
Nominal power (kVA)	60	80	100	125	160	200	250	300	400	500	600	800
Active power (kW)	54	72	90	112.5	144	180	225	270	360	450	540	720
Technology	<u> </u>							on VFI-S			0.0	
Waveform					,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		nusoidal					
Architecture				Col	nventio			lable up	to 6 unit			
put characteristics						0. 0	parano	acio ap	10 0 0.111			
Input voltage						380-4	15 V 3PI	n+N				
Input frequency					50-6			tosensir				
Input voltage range							20% / +		.9			
THD of input current							<3%	,				
		Co	onfiaur	able for s	vnchro	nism bet	ween th	e input a	ind output	frequenci	es.	
Compatibility with diesel generators								iency vai				
Input power factor							>0,99					
Output characteristics												
Output voltage					380,	400, 415	5 V 3Ph-	+N selec	ted			
Efficiency						up	to 95%)				
Output frequency (nominal)					50	60 Hz s	elected :	± 0,001%	6			
Crest factor							3:1					
THD of output voltage					<;	5% (with	non-line	ear load)				
Output voltage tolerance					±	1% (wit	h balan	ce load)				
Overload capacity			10 n	ninutes at	125%,	60 seco	nds at 1	50%, 10	seconds	at 200%		
Efficiency in Eco mode				98%						>9	8%	
D. va a a a			\ 	4: I N A	_!	D				Built-in A	Automatic	
Bypass	В	ulit-in <i>F</i>	Automa	tic and M	aintena	ance By-	pass		(optio		enance By	pass)
Batteries												
Backup time extension				Sc	alable	with add	ditional b	attery ca	abinets			
Battery type				VRLA -	AGM N	/laintena	nce-free	Lead A	cid Batterie	es		
Battery test						Automa	atic or m	anual				
Battery Recharge Profile						IU (I	DIN4177	73)				
Communication and management												
LCD Display								ıs at a gl				
			Four						s at a glan	ice LEDs		
Communication Ports								<u> </u>	al RS485)			
Audible Alarm								-	rable dela			
Configuration Setting			Auto						service e	ngineer		
Net Interface Slot				Built	in dry	contact	PCB, op	tional SN	MP card			
Emergency Power Off (EPO)							Yes					
Remote Management						Α	vailable					
Battery temperature probe							Yes					
Physical characteristics												
Dimensions H x W x D (mm)	1	670 x	815 x 8	825		1905	x 1220	x 855	1920 x 1990 x 965	2020 x 2440 x 950	2020 x 2440 x 950	1920 3640 950
Net Weight (kg)	570 600) 6	625	660	715	970	1090	1170	1820	2220	2400	3600
not moight (kg)	010 000		,20		7 10		0x1400x	l	1020	LLLO	2100	0000
Dimensions battery cabinet	1900x1	400x83	30 (50	batteries	.)) batteri			2800 x		
H x W x D (mm)				batterie:	' I		0x2800>			60 atteries)		-
						(10	0 batter	ies)	(100 bc	attorios		
Ambient conditions												
Operating temperature (°C)							0 – 40					
Relative humidity (%)						<95% n	ot conde	ensing				
Protection index							IP20					
Noise at 1 m (dBA)		<	60						<62			
Estimated content of circular economy derived materials					,		11%					
Recyclability rate calculated using the method described in technical report IEC/TR 62635*							69%					
Certifications												



Keor HPE

Conventional UPS - On-line three-phase double conversion VFI








Characteristics:

- Power from 60 to 600 kVA
- Three-phase UPS
- IGBT Rectifier
- High efficiency
- Digital signal processor (DSP)High Input Power Factor Correction (PFC)
- Output Power Factor 1
- Battery recharge, dynamic, intermittent with temperature compensation
- Low input and output total harmonic distortion values (THD)
- Compatibility with gensets
- Parallel operations with up to 6 units
- Communication ports
- Optimised cooling system

- Optimised co	omig sy	310111								
Model	UPS									
	Nominal power (kVA)	Active power (kW)	Back-up time (min)	Dimensions H x W x D (mm)	Net weight (kg)					
3 110 87	60	60	0	1500 x 560 x 940	225					
3 110 88	60	60	5	1500 x 560 x 940	525					
3 110 89	60	60	10	1500 x 560 x 940	675					
3 110 90	80	80	0	1500 x 560 x 940	250					
3 110 91	80	80	5	1500 x 560 x 940	700					
9 605 69	100	100	-	1800 x 560 x 940	320					
9 605 70	125	125	-	1800 x 560 x 940	360					
9 605 71	160	160	-	1800 x 560 x 940	380					
9 605 72	200	200	-	1978 x 880 x 970	530					
9 535 00	250	250	-	1978 x 880 x 970	745					
9 535 01	300	300	-	1978 x 880 x 970	675					
9 535 02	400	400	-	1978 x 1430 x 970	1080					
9 535 03	500	500	-	1978 x 1430 x 970						
3 111 30	600	600	-	1978 x 1630 x 970	1400					
	Acces	sories								
9 535 16	Paralle	l interfac	ce *							
9 535 17	Interfac	ce for M	ODBUS RS485	5						
-	Empty battery cabinets									
	Options									
	,		it on two UPS*							
			it on two paral	lel UPS**						
	Isolatio	Isolation transformer								




7" touch display (for Keor HPE 60-160)


Common battery kits


IP 21 Kit

NOTE: the stated backup times in minutes are estimated and may vary according to the load characteristics, operating conditions and environment.


For the choice of communication accessories, see the dedicated section of this catalogue.

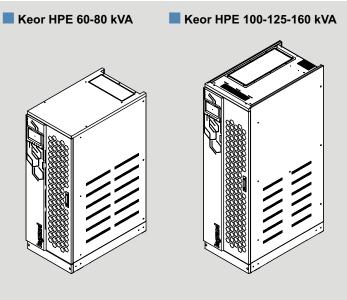



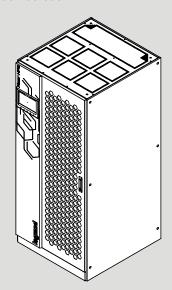

Keor HPE 400-500-600 kVA

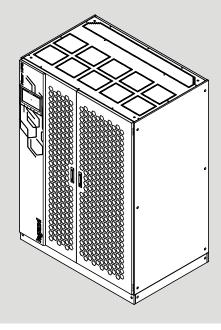

to create two independent synchronous electrical lines (typical in Tier III, IV systems)



Keor HPE

Conventional UPS - On-line three-phase double conversion VFI

General Characteristics	60	80	100	125	160	200	250	300	400	500	600
Nominal power (kVA)	60	80	100	125	160	200	250	300	400	500	600
Active power (kW)	60	80	100	125	160	200	250	300	400	500	600
Technology		1			Double Co	nversion \	/FI-SS-11	1	1		
Waveform		_			Sinus	soidal					
UPS Architecture			Conven	tional UP	S parallel o	perations	with up t	o 6 units			
nput					<u>'</u>	<u>.'</u>	<u> </u>				
Input voltage				3	380-400-4°	15 V 3Ph+	N				
Input frequency					50-60 Hz	(45÷65Hz	·)				
Input voltage range					400 V -20	`					
THD Input current						3%					
		Config	urable to	achieve s	synchronis		veen the in	nout freat	Jencies		
Compatibility with genset					ncies, als	o for wide					
Input power factor					> ().99					
Dutput					00 400 4	45) / ODI					
Output voltage		050/			80, 400, 4	15 V 3Ph-	-N		00.40/		
Efficiency	Up t	o 95%		Up t	o 96%	20.11-		Up to	96.4%		
Nominal output frequency						60 Hz					
Peak factor			-10/	/!tla I!.a.a.		:1		la a al\			
THD of Output voltage			<1%	`	ear load) <			1080)			
Output voltage tolerance	10 :		-0/ 00		1% (with b	alanced lo	pad)				
Overload capacity	10 min	utes at 125 15 0,1 secon	0%		10 minu		%, 5 minu % 0.1 sec		5%, 30 se 50%	conds at	
Efficiency in Eco Mode					> 9	98%					
Bypass				Automa	tic and ma	aintenanc	e bypass				
Batteries											
Internal batteries	yes	yes	-	-	-	-	-	-	-	-	-
Backup time extension				Yes with	n additiona	al battery	cabinets				
Battery series type			VRLA	A- AGM Le	ead Acid,	sealed, m	aintenanc	e-free			
Battery test					Automatic	or manua	al				
Battery charger					IU (DIN	J41773)					
Communication and management											
LCD Display	LCD ar	nd LED dis eal-time 4 (optiona	menu nav	nonitor UF vigation bu n screen)	PS status uttons	10" to		n display status n real-tim	to monitore	or UPS	
Communication ports					contact ca ptional), n			t			
Alarms and signals			С	onfigurab	le audible	alarms a	nd warnin	gs			
Emergency Power Off (EPO)					y.	es					
Remote control					avai	lable					
Battery temperature sensor					У	es					
Mechanical characteristics											
Dimensions (HxWxD) (mm)	1500 x	560 x 940	180	00 x 560 x	(940	197	78 x 880 x	970	1978 x 1	430 x 970	1978 x 163 x 970
Net weight (kg)	225	250	320	360	380	530	745	675	1080	1250	1400
Ambient conditions											
Operating temperature (°C)					0 -	- 40					
Relative humidity (%)				<	95% non	condensi	ng				
Protection rating					IP	20					
Noise at 1 m from the unit (dBA)			< 60				< 65		< 7	'2dB	< 80
Estimated content of circular economy derived materials					33	3%					
Recyclability rate calculated using the method described in					90	.1%					
technical report IEC/TR 62635*											
technical report IEC/TR 62635* Conformity											



Keor XPE

Scalable UPS - Online three-phase double conversion VFI







Power unit Up to 7 units



Distribution cabinet (optional)

Characteristics

- On-Line Double Conversion VFI SS 111
- 3-level IGBT technology Transformer Free
 Output power factor = 1 without downgrading up to 40°C in continuous operation mode (VFI)

 - Configurable internal redundancy (N + 1 or N + X).
- Hot maintainable modules
- Hot scalability (optional)
- Up to 96,4% efficiency VFI even at low power
- ECO mode up to 99% of efficiency.
 Built-in backfeed protection
- Automatic battery test feature.
- Genset compatibility with Adaptive Ramp-in
- Compact design.
- Low audible noise.
- Synch 2N

Components	UPS

	Nominal power (kVA)	Active power (kW)	Dimensions HxWxD (mm)
POWER UNIT	250	250	880x979x2100
POWER UNIT	300	300	880x979x2100
IOBM 600	600	600	1002x979x2100
IOBM 750	750	750	1450x979x2100
IOBM 900-1000	1000	1000	1500x979x2100
IOBM 1200-1500	1500	1500	1850x1000x2100
IOBM 1800-2100	2100	2100	2300x1200x2100
DISTRIBUTION CABINET*	2 x 300 kV	V lines	350x979x2100
DISTRIBUTION CABINET*	3 x 300 kV	V lines	350x979x2100
DISTRIBUTION CABINET*	4 x 300 kV	V lines	350x979x2100
DISTRIBUTION CABINET*	5 x 300 kV	V lines	350x979x2100

^{*} for hot-swapping

Options

Description

Future Scalability Hot Scalability

Input Line: Dual/Single

Connection Entrance: Bottom/Top Connection Type: Cable/Busbar Grounding System: TNC/TNS

Icw limitation kit

Battery set: Centralized/Distributed

Central or side IOBM

Special distribution kits for customised cabinet layouts

IP21 Kit

Accessories

Description

Battery cabinets

Battery switch fuse box

Synchronisation box

MODBUS RS485 card

Ethernet card with network interface

Please contact Legrand for further details on the configurations and accessories.

Dimensions 770 110 957 985 880 450 880

Keor XPE

Scalable UPS - Online three-phase double conversion VFI

General Characteristics	IOBM 600	IOBM 750	IOBM 900	IOBM 1000	IOBM 1200	IOBM 1250	IOBM 1500	IOBM 1800	IOBM 2100
Nominal power (kVA)	600	750	900	1000	1200	1250	1500	1800	2100
Power Unit power (kVA)	300	250	300	250	300	250	300	300	300
Number of power units (+1 redundant)	2+1	3+1	3+1	4+1	4+1	5+1	5+1	6+1	7
Technology			C	n-Line Doub	le Conversi	on VFI-SS-1	11		
Architecture		Dec	centralised I	ogic, central	ised static b	ypass, scala	able, redunc	dant,	
				hot-swap se	rvice (optio	nal hot plug)			
Input	I								
Input voltage		400 V	/ac three-ph	ase (rectifie	<u> </u>		e-phase (By	(pass)	
Input frequency					Hz; range 45		,		
Input Voltage Range (Ph-Ph)			-	20%, +15%	·	10% (bypass	s)		
THD Input current					< 3%				
Compatibility with genset					Yes				
Input power factor					> 0.99				
Output									
Output voltage), 415V (3Ph				
Online Efficiency					up to 96.4%				
Efficiency in GREEN Mode					up to 99%				
Nominal output frequency			50	/60 Hz (Adju	istable from	the front pa	nel)		
Peak factor					up to 3:1				
THD of Output voltage					6 with linear				
Output Power Factor				ch reaches 0			<u> </u>		
Output voltage adjustment VFI			Statio	c ± 1%; Dyna	amic Class	1 IEC/EN 620	040-3		
Overload capacity			Inv	erter: 125%	for 5 min, 1	50% for 30 s	ec;		
Bypass									
Туре		,	Automatic s	tatic without	interruption,	manual byp	oass optiona	al	
Input voltage				380-400-41	5V ± 20%; (3Ph+N+PE)			
Input frequency				50	0-60Hz ± 10	%			
Rated current (A)	870	1090	1304	1450	1739	1810	2175	2609	3044
Max. LCW			50 k	A IEC 62040	-1 standard	(100 kA opt	ional)		
Batteries									
Battery type				VRI	_A, NiCd, Li	-lon			
Connecting the battery				Distrib	uted or cent	ralised			
Communication and management									
LCD Display				10" Touch s	creen, 1024	x600 pixels			
Communication ports			R	S232, USB, R	S485, netwo	rk interface s	lot		
Input and auxiliary contact signal ports.	Ren	note Emerge External a	automatic sw	off (REPO), di vitch auxiliary remote outpu	contact: bat	tery, external	maintenanc	y circuit brea e bypass,	aker.
Output signal ports				5 dry conta	cts, externa	l BackFeed			
Mechanical characteristics									
Connection lines		Wired	TNC or TNS	3PH output,	rectifier and	d bypass (si	ngle input o	ptional)	
Input and connection type			Bottom	(top as option	onal), cable	(busbar as d	optional)		
Colour	RAL 9003	(white) on the	he front pan	el of the IOE	3M; RAL 900	5 (black) bo	dy and side	panels of a	all cabinets
UPS dimensions WxDxH (mm)*	2770x970x 2100	4090x9	70x2100	4970x980x 2100	5370x980x 2100	6250x98	30x2100	7580x1200x 2100	8460x1200 2100
UPS weight (kg)*	2250	3150	3300	4000	4250	4900	5200	6400	7300
Ambient conditions									
Operating temperature (°C)		0 - 40 °C	C (recomme	nded tempe	rature for lo	nger useful b	oattery life: 2	20-25°C)	
Relative humidity (%)				20-95%	6 (non cond	ensing)			
Protection rating				IP20	(IP21 Optio	onal)			
Noise at 1 m from the unit (dBA)					< 65				
Estimated content of circular economy derived materials					≃ 20%				
Recyclability rate calculated using the method described in technical report IEC/TR 62635*					≃ 60%				
Conformity									

^{*} Weights and dimensions depend on the configuration chosen and refer to the complete basic system (no redundancy, no hot swapping).
**This value is based on data collected from a technological channel operating on an industrial basis. It does not pre-validate the effective use of this channel for end-of-life of this product.



UPSaver is a high power UPS based on hot scalable 333 kVA modules. It can reach up to 2.67 MVA in a single unit. The single units can be paralleled up 21 MVA.

UPSaver is the ideal solution for data center and IT business critical applications, providing the highest reliability and availability.

The flexibility of the system is designed to adapt itself to the critical and changing data center demands.


With state-of-the-art components,

UPSaver is one of the most compact, efficient and fully adaptable power protection system.



Reduced TCO

- Pay as you grow through hot scalability.
- Tailored to the room layout with total flexibility in design and installation.
- Quick upgrade and maintenance thanks to hot scalability, serviceability and minimal spare parts.
- Enhanced efficiency thanks to automatic output power control.
- Always delivering maximum performance with high efficiency operating modes.
- Less consumption to reduce carbon footprint.

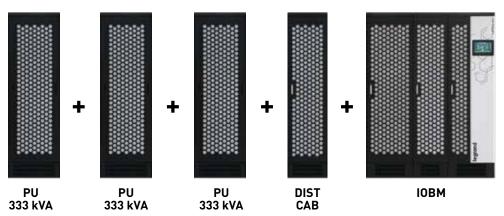

Up to 8 Power Units of 333 kVA = 2.6 MVA

UPSaver modular design allows easy system resizing by addition of power units.

Maintenance operations can be done without powering down the system and without switching to bypass line.

TCO: Total cost of ownership



UPSaver

Scalable High-Power UPS up to 2.67 MVA







(PU) (Optional)

In/Out-Bypass Module (IOBM)

Characteristics

- Hot swappable 333 kVA power units on VFI mode
- Hot scalable 333 kVA power units to 2.67 MVA
- 97.2% efficiency
- Flexibility in system design and installation
 Power parallel scalable up to 21 MVA
- Low audible noise level <65 dB
- Top busbar entry
 Low input capacitive power for genset flexibility
- Peak shaving capable
- Lithium battery compatible

Model	UPSave	er Comp	onents	
	Nominal power (kVA)	Active power (kW)	Max dimensions full option W x D x H (mm)	Max weight full option (kg)
POWER UNIT (PU)	333	333	650x970x2150	570
IOBM 670	670	670	2500x970x2150	1000
IOBM 1000	1000	1000	2500x970x2150	1000
IOBM 1340	1340	1340	3950x970x2150	1925
IOBM 1670	1670	1670	3950x970x2150	1925
IOBM 2000	2000	2000	3750x1200x2150	2350
IOBM 2340	2340	2340	4250x1200x2150	2640
IOBM 2670	2670	2670	*	*

^{*} contact our sales team

Optionals

Description Hot Scalability

Input Line: Dual/Single

Connection Entrance: Bottom/Top Connection Type: Cable/Busbar Grounding System: TNC/TNS

Icw limitation kit

Battery set: Centralized/Distributed

Accessories

Description


Battery Cabinets

Battery fuse switch box

Synch Box

Net Interface Ethernet Cards

For configuration details and accessories, please contact Legrand.

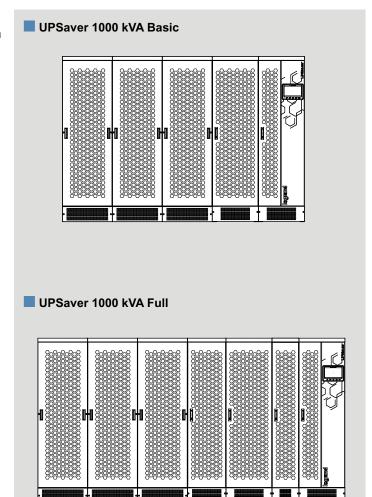



UPSaver

Scalable High-Power UPS up to 2.67 MVA

General specifications	IOBM 670	IOBM 1000	IOBM 1340	IOBM 1670	IOBM 2000	IOBM 2340	IOBM 267	
Nominal Power = Active Power (kW)	670	1000	1340	1670	2000	2340	2100	
Power Unit power (kW)	333	333	333	333	333	333	333	
Number of Power Units (+1 if Redundant)	2+1 3+1 4+1 5+1 6+1 7+1							
Technology			On-line dou	ible conversion	VFI-SS-111			
Architecture	Ce	ntralized Static	Bypass, Scalab	ole, Redundant	, Hot Service (H	lot Swap Option	nal)	
nput					<u> </u>			
Input Voltage		400 Vac	3-phase (rectifi	er), 380/400/41	5 Vac 3-phase	(Bypass)		
Input Frequency		50/60 Hz; range 45-65 Hz						
Input Voltage Range (Ph-Ph)			-20%, +15%	6 (rectifier); ±10	0% (bypass)			
THD of input current				< 3%				
Compatibility with Diesel Generators				Yes				
Input power factor				> 0.99				
Output								
Output Voltage			380-400-41	5 Vac 3-phase	with neutral			
Efficiency Online				up to 97.2%				
Efficiency in UHE mode				up to 99%				
Output frequency (nominal)			50 /60 Hz (A	Adjustable from	front panel)			
Output frequency tolerance			±0,1%Synch	with Mains; ±0	,01% Free Run			
Crest Factor				up to 3:1				
THD of output voltage			< 1	% at full linear	oad			
Output power factor			up to 1,	without power	derating			
Output voltage Regulation VFI		S	static ± 1%; Dyr	namic: IEC/EN	62040-3, Class	1		
Overload Capability		Inverter: 10	5% continuous	at 30°C, 125%	for 10 min; 150	% for 1 min;		
, ,	b	ypass: 110% co	ontinuous; 1509	% for 1 min; 700	0% for 100 ms;	1000% for 10 m	าร	
Bypass				 				
Type		S			al Bypass option	al		
Input Voltage			380-400-4	$415V \pm 20\%$; (3F				
Input Frequency	074	1.140	10.10	50/60Hz ± 10%		0004	0070	
Nominal Current (A)	971	1449	1942	2420	2899	3391	3870	
Max Icw			50 kA as per i	EC 62040-1 (10	u ka Optional)			
Batteries Battery/Storage Compatibility			\/	RLA. NiCd. Li-l				
Battery/Storage Compatibility Battery Connection				,,				
Communication and management			DISITI	buted or Centra	alizeu			
Control Panel Display			10" Touch	screen, 1024x	600 pivols			
Communication ports	Sorial DS21	32 and USB; Mo				ModRus TCD/ID	\ (Ontional)	
·		ency power off (F					/ \ /	
Input signal ports and aux.contact.		circuit breakers:						
Output signal ports			5 dry con	itacts, external	BackFeed		·	
Physical characteristics								
Connection Lines	H	ardwired 3PH TI	NC or TNS Outp	out, rectifier and	l bypass (single	input as option	al)	
Connection Entrance and Type		Bot	tom (top as opt	tional), cable (b	usbars as optio	nal)		
Color			RAL9005	(Black) RAL90	03 (White)			
UPS dimensions WxDxH (mm)*	3800 x 970 x	4450 x 970 x	6550 x 970 x		7650 x 1200 x		(***)	
` ′	2150	2150	2150	2150	2150	2150		
UPS weight (kg)*	2140	2710	4205	4775	5770	6630	(***)	
Environmental conditions								
Operating Temperature (°C)		0 - 40 °C (Re			onger Battery L	ife: 20-25°C)		
Relative Humidity Range				5% (Non-Conde				
Protection degree			IP.	20 (IP21 Option	al)			
Acoustic Noise at 1m (dBA)				< 65				
Estimated content of circular economy				32%				
derived materials (%)	90.2%							
				90.2%				
derived materials (%) Recyclability rate calculated using the method described in technical report				90.2%				






Battery cabinet

For all three-phase UPS







3 109 82 up to 62 batteries 105 Ah

Universal battery cabinets for all three-phase Legrand UPS from 10kVA up to 800kVA power range. The Battery cabinet is designed to house standard VRLA Batteries of capacity range from 24Ah to 105Ah (C10). The battery cabinets are available in 5 different mechanical dimensions, are able to contain various combination of Batteries, up to maximum 63 blocks, connected in series and parallel, with positive, negative and middle point poles and with max DC voltage of 800Vdc.

EMPTY BATTERY CABINET* Standard No. Of Blocks Cabinet Dimensions TOT Indicative **UPS** Compatibility Battery Capacity (Ah) (mm) 3 106 26 800x900x1420 213 24 60 Keor T 800x900x1420 Trimod HE 3 106 27 214 24 40 800x900x1420 55 20 Trimod HE 3 106 55 213 800x900x1420 70-93 Trimod HE 3 106 56 215 20 800x900x1420 105 Trimod HE 3 106 57 215 20 3 106 59 800x900x1900 253 24 60-62 Keor HPE 3 106 73 800x900x1900 253 41 60-62 Keor HPE / Keor T 800x900x1900 254 55 42 3 109 41 Trimod HE 1200x900x1900 333 55 60-62 Keor HPE / Keor T 3 109 44 335 3 109 65 1200x900x1900 Keor MOD / Keor HP 70-93 50-52 336 3 109 66 1200x900x1900 70-93 40-42 Trimod HE 1200x900x1900 335 105 50-52 Keor MOD / Keor HP 3 109 67 **3 109 68** 1200×900×1900 336 105 42 Trimod HE **3 109 80** 1400×900×1900 385 70-93 60-62 Keor HPE / Keor T **3 109 81** 1400×900×1900 385 70-93 60 Trimod HE **3 109 82** 1400×900×1900 385 105 60-62 Keor HPE / Keor T **3 109 83** 1400×900×1900 385 105 60 Trimod HE

Characteristics

General characteristics	
Nominal Voltage	800 Vdc
Battery segregation	Internal panel in Polycarbonate
Switches and protection access	Internal bottom front side
Disconnection and protection devices *	Fuse Holders Switch with NH fast fuses (sized accordingly with Battery Power)
Fuse holder Open/Close signal*	Auxiliary Micro Switch
Cable Entrance	bottom sides (both left and right)
Cable connections	On Fuse holder terminals
Max Cable side entrance	3x 150mm²
Cabinet Access	Front door with key lock and removable sides and rear panels
Shelter Bent Metal Sheet Thickness	20/10
Shelves Bent Metal Sheet Thickness	30/10
Protection Degrees	IP20 (Optional IP21)
Colour	RAL 7016
Standard	IEC-EN 62040-1

 $^{^{\}star}$ in the cabinet are included Fuse Holder Switch and Fuses. Batteries not included




AND SOFTWARE





Management software

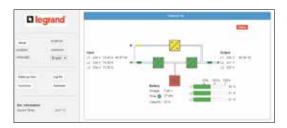

Pack	Cat. Nos.	Software
		Description
1	free download*	UPS Management Software Set of applications for real-time control of the operation of the UPS and to ensure the integrity of the systems on the computers supplied by this UPS. Free download from the Legrand UPS website.
1	free download	RCCMD Software enabling a computer to receive and execute, using the TCP/IP protocol, all the remote commands sent by the management systems of the UPS. An RCCMD licence is necessary for each computer to be controlled. The software can be downloaded free from Internet.
	free download*	UNMS "WEB based" application capable of real-time supervision of the status of all UPS, via the management systems of the UPS and the TCP/IP protocol. License for 25 UPS.
1	3 108 92	UNMS UNMS licence for 50 UPS
1	3 108 93	UNMS UNMS licence for 150 UPS

*Licence for 25 UPS

Examples of types of management and communication that can be created with software and hardware.

Local protection

Protects one station only (PC or server) and must be installed at a distance of less than 12 metres (RS232) or 5 metres (USB)




Software

■ Extended local protection

Protects multiple stations (PC or server) but all must be dependent on the COMPUTER that controls the UPS.




■ Protection via TCP/IP network

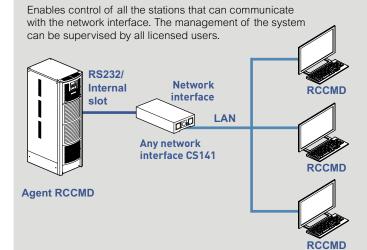

Centralised protection

Using the UNMS supervision software, it is possible to control all the UPS connected to a TCP/IP network via any network interface that supports SNMP v2 (standard RFC1628).

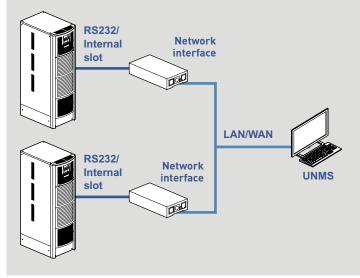




Network interfaces CS141



Pack	Cat. Nos.	Network interface CS141
		Network interfaces for UPS management do not require external software; in fact, they are equipped with their own proprietary operating system which is able to continuously control the UPS operations and handle multiple events (power failure, overload, bypass, anomaly, etc.) and consequently to carry out a series of actions, such as, for instance: - Saving of event logs complete with date and time - Saving of main operating data trends complete with date and time - Sending of emails - Performance of scheduled actions - Display of pop-up messages, shutdown operations and custom commands on remote computers (it is necessary that the RCCMD software agent is installed on these computers) - Switching ON and OFF the UPS - Sending of "Wake on LAN (WOL)" signals - SNMP protocol support - Sending of SNMP trap messages - Data display and configuration via internet browser - Firmware downloadable free of charge from the Internet - 1Gbit with self-recognition function - DHCP function - No. 1 RCCMD license included - Available in both internal and external versions, the internal version is housed in a dedicated UPS slot The professional versions have an additional RS232 communication port The industrial versions have an additional RS485 communication port.
1	3 109 30	CS141 SK Professional network interface, internal version (slot)
1	3 109 31	CS141B SK Standard network interface, internal version (slot)
1	3 109 32	CS141 Professional network interface, external version
1	3 109 34	CS141M Industrial network interface, external version
1	3 109 35	CS141M SK Industrial network interface, internal version (slot)

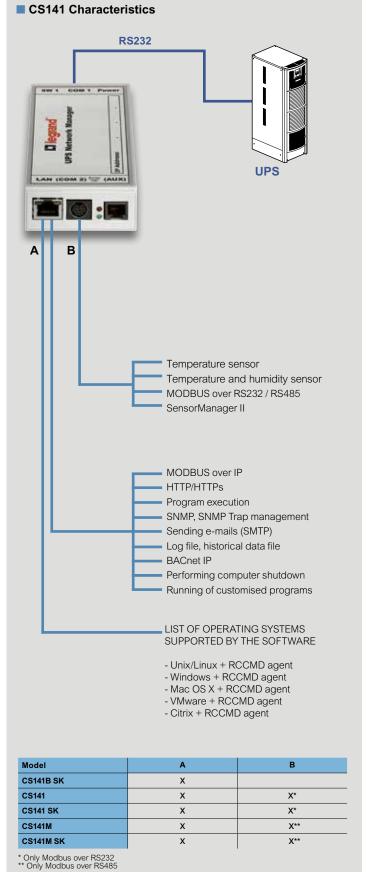




Sensors and other accessories



Pack	Cat. Nos.	Sensors
		Description
1	3 108 97*	SM_T_COM Temperature sensor for direct connection to the COM2 port on the CS141 and CS141 SK interfaces. Cannot be used withSensorManager II.
1	3 108 98*	SM_T_H_COM Combined temperature and humidity sensor for direct connection to the COM2 port on the CS141 and CS141 SK interfaces. Cannot be used with SensorManager II.
1	3 108 99	SensorManager II Manager for sensors: connects to the COM2 port on the CS141 and CS141 SK interfaces and manages up to 8 analogue inputs, 4 digital inputs and 4 digital outputs. The configuration is managed directly by the CS141 interfaces (PROFESSIONAL version), described previously. The "Scale Divisor" and "Off set" configuration functions enable SensorManager to be used with any analogue sensor (see characteristics). It includes 1 "SM_T" temperature sensor
1	3 109 00**	SM_T Temperature sensor that can only be used with SensorManager II. It enables another "SM_T" sensor to be connected using a special connector.
1	3 109 01**	SM_T_H Combined temperature and humidity sensor that can. Only compatible with SensorManager II.
1	3 109 02	Door sensor This consists of a reed switch and a magnet. Only compatible with SensorManager II.
1	3 109 03	SM_flash Flashing illuminated signal. Only compatible with SensorManager II.

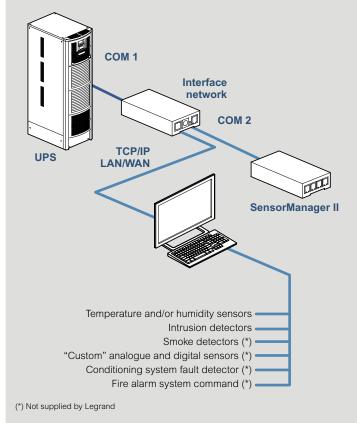

■ SensorManager II technical characteristics

Supply voltage (VDC)	9 — 24
Temperature (°C)	0 — 65
Non-condensing humidity (%)	10 — 80
Analogue inputs (V)	0 — 10
Digital inputs (V)	9 — 24
10 mA digital outputs (V)	9 — 24
Dimensions (WxDxH) (mm)	70 x 130 x 30


■ Sensor technical characteristics

	3 108 97	3 108 98	3 109 00	3 109 01		
Temperature range °C	-25 to +100	-25 to +100	0 to +100	0 to +100		
Relative humidity ± 5% (%)		0 to 100		0 to 100		
Connection cable included (m)	1.8	1.8	5	5		
Dimensions H x W x D (mm)	27 x 70 x 70					


^{*} Direct from the network interface ** Direct from SensorManager



Network interfaces

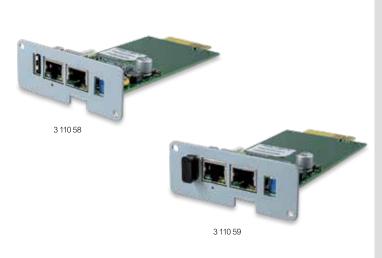

Pack	Cat. Nos.	Network interface CS102
		Network interfaces for UPS management via LAN or Wi-Fi connection. The Wi-Fi dongle allows the UPS to be connected to the data network without additional cables. The network interfaces CS102 is able to continuously control the UPS operations and handle multiple events (power failure, overload, bypass, anomaly, etc.) and consequently to carry out a series of actions, such as, for instance: - Saving of event logs complete with date and time - Saving of main operating data trends complete with date and time - Sending of emails - Display of pop-up messages, shutdown operations and custom commands on remote computers (it is necessary that the CS102 shadown client software agent is installed on these computers) - Switching ON and OFF the UPS - Sending of "Wake on LAN (WOL)" signals - SNMP protocol support - Sending of SNMP trap messages - Data display and configuration via internet browser - Firmware downloadable free of charge from the Internet - 10/100Mbit Base-T Ethernet connection (half-duplex and full-duplex) with self-recognition function - DHCP function The card is housed in a dedicated UPS slot. Compatible with Daker DK Plus, Keor SPE, Keor S, Keor LP, Keor Line RT, Keor T, Keor T Evo, Keor Compact
1	3 110 58	CS102 Network interface
1	3 110 59	CS102 SK + Wi-Fi dongle Network interface with USB dongle to enable Wi-Fi connection.

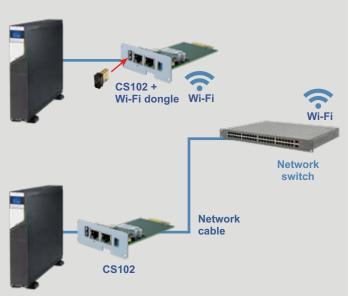

MODBUS over IP HTTP/HTTPs Program execution SNMP, SNMP Trap management Sending e-mails (SMTP) Log file, historical data file Performing computer shutdown

LIST OF OPERATING SYSTEMS SUPPORTED BY THE SOFTWARE

- Linux
- Windows

67



COMMUNICATION ACCESSORIES COMPATIBILITY TABLE

	UPS Management Software	CS141 SK	CS141B SK	CS141	CS141M	CS141M SK	CS102	CS102 SK
	Free	3 109 30	3 109 31	3 109 32	3 109 34	3 109 35	3 110 58	3 110 59
Keor PDU	1							
Keor SP	1							
Keor SPX	1							
Niky S	1			√	1			
Keor LINE RT	1	1	1			/	1	1
Keor SPE	1						1	1
Keor LP	1	1	1			1	1	1
Daker DK Plus	1	1	1			1	1	1
Keor S 3000	1	1	1			1	1	1
Keor S 6000 - 10000	1	1	1			1	1	1
Megaline / Megaline Rack	1			√	1			
Keor Compact	1	1	1			1	1	1
Keor T	1	1	1			1	1	1
Keor HP	1	1	1			1		
Keor HPE	1	1	1			1		
Trimod HE	1	1	1			1		
Keor MOD		1	1			1		


Other accessories

	SM_T_COM	SM_T_H_COM	Sensor Manager	SM_T	SM_T_H	Sensore porta	SM_Flash
	3 108 97	3 108 98	3 108 99	3 109 00	3 109 01	3 109 02	3 109 03
3 109 30 - CS141 SK	√*	√ *	√ *				
3 109 32 - CS141	√*	√ *	√ *				
3 108 99 – Sensor Manager				1	1	1	✓

^{*} Not for simultaneous use



CUSTOMER SERVICES

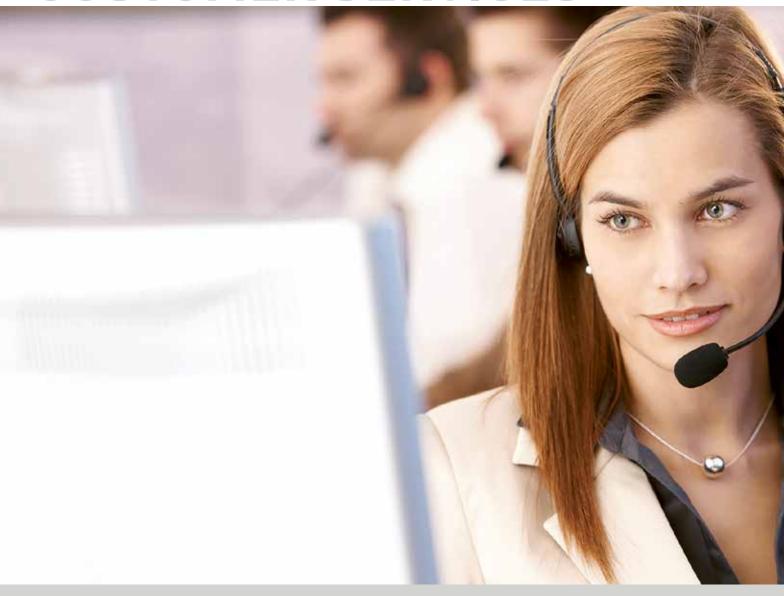

Reliable

Directly present in more than 70 countries and servicing its products in more than 150 countries worldwide, a team of qualified engineers is available to support your UPS system to ensure power quality and availability to the most critical loads.

Excellent

Legrand's competitive edge lies in its ability to provide high value-added UPS systems and services for both end users and business partners.

For Legrand, creating value means coming up with solutions for lower energy consumption, but also integrating product design into the overall development process. With around 200 000 catalogue items, the Group also provides all products required for electrical and digital building installations, particularly as integrated systems, finding solutions to fit everyone's needs.

Tailor-made

Legrand offers a complete range of specific solutions and services to meet customer requirements:

- Technical pre-sales support at the project design stage
- Factory acceptance test
- Supervision of installation, testing and commissioning, site acceptance test
- Operator training
- Site audit
- Warranty extension
- Annual maintenance contract
- Fast intervention on emergency call

CUSTOMER SERVICES



SITE INSPECTION, INSTALLATION SUPERVISION.

We perform a comprehensive check of the UPS environment to ensure safety and fault-free operation.

Our technical experts give manufacturer's recommendations to the site engineer or electrical contractors, and supervise the UPS installation before load power-up.

SITE TEST, COMMISSIONING.

Our Service Engineers conduct rigorous site tests and full setting-up of the UPS system before going live. They also perform site acceptance tests according to your requirements. Commissioning operations for all UPS are carried out by qualified engineers to guarantee seamless start-up. After the final handing over of the UPS system, a Test and Commissioning report is delivered to you.



We offer on-site training to ensure your equipment's safe and efficient operation.

Troubleshooting courses are also available in our plants for intensive hands-on practice on UPS training equipment.



PREVENTIVE MAINTENANCE

Electronic equipment and power systems, such as UPS, contain life-limited components and parts that must be replaced according to the manufacturer's specifications.

To ensure optimal performance and to protect your critical application from potential downtime, it is crucial to perform

preventive maintenance operations on a regular basis and replace parts when needed. Our Service Contracts include cleaning, IR thermography, measurements, functional tests, event log and power quality analysis, battery health check, hardware and software upgrades, and technical reports. A Preventive Maintenance Plan is one of the most cost-effective actions that can preserve your initial investment and ensure your business continuity.

CORRECTIVE MAINTENANCE, EMERGENCY CALL

In the event of an Emergency Call, our worldwide service network, with engineers and spare-parts stocks strategically located as close as possible to your site, guarantees a fast intervention time with 24/7/365 assistance.

After connecting his laptop to your UPS, very powerful diagnostic software helps our engineer to identify the fault, thus ensuring short MTTR (Mean Time To Repair).

Corrective actions are performed such as part replacement, adjustments and upgrades to return the UPS system back to normal operation.





World Headquarters and International Department

87045 Limoges Cedex - France : + 33 (0) 5 55 06 87 87 Fax : + 33 (0) 5 55 06 74 55